



Product Features:

- Universal input voltage / Full range: 90~305Vac;
- Class II design;
- Constant power design, output current programming adjustable;
- (M types) off-line programmable, (N types) output current adjustable by built-in potentiometer;
- 3-in-1 dimmable: 0~10Vdc, PWM, Positive and negative logic, Timer dimming, Dim-to-off;
- (M types) Constant lumen output; daily log
- Output and Dimming Signal Isolating;
- Surge protection: 6KV line-line;
- Protections: SCP, OVP, OTP;
- IP67 design for indoor and outdoor applications;
- Suitable for dry / damp / wet locations;
- 5 years warranty.

Application:

- Suitable for LED roadway lighting, plant lighting, industrial lighting, landscape lighting, etc.

DESCRIPTION

The XCP-240W series is outdoor off-line programmable LED driver that operates in constant current with high PF value and universal input voltage range of 90~305Vac. Monitored off-line by dimming cable connected with a USB kit programming device, the fully programmed drivers offer all dimming, dim-to-off, constant lumen output options and a wide range of output current in a single driver, providing maximum flexibility with customized operating settings and intelligent control options for lighting manufacturers, as one driver can be programmed for many different luminaire designs. XCP provides built-in timer dimming schedules that further increase the energy savings and CO₂ reductions achieved with LED lighting. It also helps customers to improve logistics and inventory management. The compact metal case and high efficiency enables the driver to operate with high reliability and extend product life. Overall protection is provided against lightning surge, output over voltage, short circuit, and over temperature, to ensure low failure rate.


MODELS

Model Number [1]	Max Output Power (W)	Output Voltage Range (Vdc)	Output Current Adjustable Range (Vdc)	Full Power Current Adjustable Range (A) [2]	Default Output Current Setting(A)	Typical Efficiency [3]	Power Factor
XCP-240Y343	240	171-343	228-343	0.70-1.05	1.05	93.5%	0.97

Notes:

- [1]. Y can be M or N. Y=M means dimmable and off-line programmable, The adjustable I_{out} range: 10%-100% I_{max}; Y=V means non-dimmable and output current adjusted by built-in potentiometer.
- [2]. Output current adjustable range with constant power at max output power.
- [3]. All specifications are measured at 25°C ambient temperature, input voltage 230Vac, and the typical value tested by full load, if no specific note.

OPERATING AREA I-V

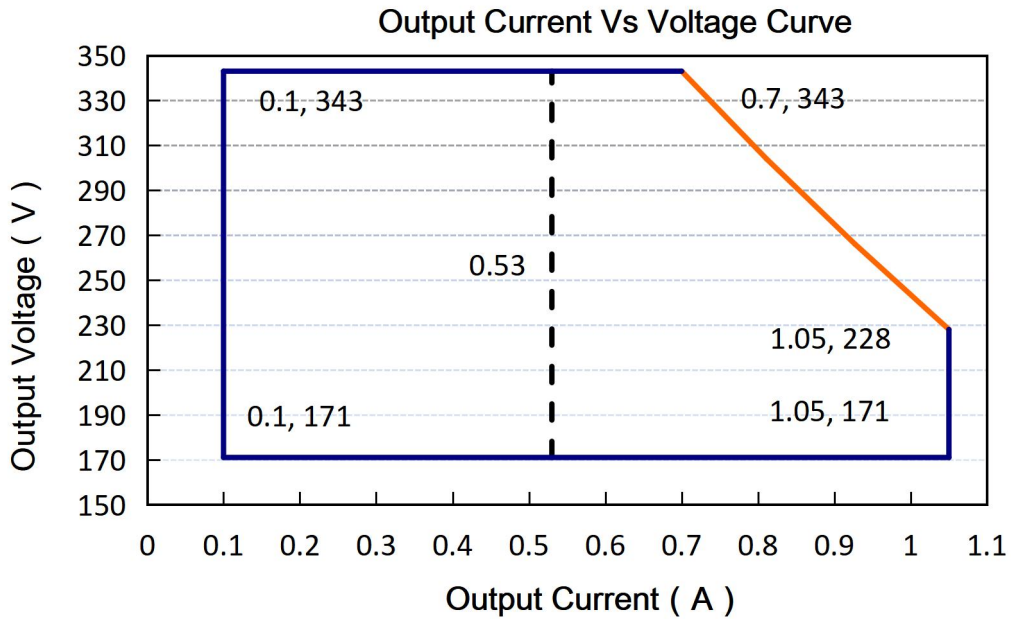

Notes: The drivers are not allowed to work in over-load condition, otherwise warranty will expire.
Y=V is suitable for the right area of the dotted line; **Y=M** is suitable for the solid line contain area.

INPUT SPECIFICATIONS

Parameter	Min.	Typ.	Max.	Notes	
Input Voltage	90Vac	100-277Vac	305Vac		
Input Frequency	47Hz	50/60	63Hz		
Leakage Current	-	-	0.70mA	277Vac/60Hz	
Input AC Current	-	-	3.3A	100-277Vac & full load	
Inrush Current	-	-	75A	230Vac & full load	
Standby Power Consumption			2W	Dim to off	
Power Factor	0.97	0.99	-	120Vac, 50-60Hz, full load	
	0.95	0.97		230Vac, 50-60Hz, full load	
	0.92	0.95		277Vac, 50-60Hz, full load	
THD	-	5%	10%	100-240Vac, 50-60Hz, 50%-100% load	
	-	-	15%	277Vac, 50-60Hz, 70%-100% load	
Max. NO. of PSUs on CIRCUIT BREAKER	B10	1	B16	2	230Vac
	C10	2	C16	3	

OUTPUT SPECIFICATIONS

Parameter	Min.	Typ.	Max.	Notes
Output Current Tolerance	-5%	-	5%	
Output Current Setting Range(A) XCP-240Y343	0.53	-	1.05	The 'M type' adjustable lout range: 10%-100% I _{max} ,
Output Current Setting Range with Constant Power XCP-240Y343	0.70	-	1.05	
Total Output Current Ripple(pk-pk)	-	5%	10%	20MHz BW, full load& LED load, the ripple would be tiny different under different LED load.
Startup Overshoot Current	-	-	10%	100~277Vac &100% Load, load is LED
No Load Output Voltage XCP-240Y343	-	-	360	
Line Regulation	-1%	-	1%	25°C±10°C ambient temperature, input voltage changes from 100Vac to277Vac.
Load Regulation	-3%	-	3%	25°C±10°C ambient temperature, Input Voltage 230Vac, load changes from 60% to 100%.
Turn-on Delay Time	-	0.5S	2S	120Vac,100% load
	-	-	0.5S	230Vac,100% load

GENERAL SPECIFICATIONS

Parameter	Min.	Typ.	Max.	Notes
Efficiency @120Vac I _o =0.70 I _o =1.05	89% 89%	91% 91%	-	Measured at full load and 25°C ambient temperature
Efficiency @230Vac I _o =0.70 I _o =1.05	91.5% 91.5%	93.5% 93.5%	-	Measured at full load and 25°C ambient temperature
Efficiency @277Vac I _o =0.70 I _o =1.05	92% 92%	94% 94%	-	Measured at full load and 25°C ambient temperature
Dielectric Strength	Input-Output	-	3750Vac	Max 5mA/60S
	Input-Case	-	3750Vac	
	Output-Case	-	1600Vac	
Grounding Resistance	-	-	0.1Ω	25A/60S, under 25°C±10°C ambient temperature
Insulation Resistance	10MΩ	-	-	Input-Output, Input-PE, Output-PE, 500Vdc/60S/25°C/70%RH
MTBF	-	200000Hrs	-	25°C±10°C ambient temperature, 230Vac,80% load (MIL-HDBK-217F)
Lifetime	-	100000Hrs	-	230Vac&100% load, 75°C case temperature, refer to lifetime curve for details
Ambient Temperature	-40°C	-	+60°C	Reference derating curve
Operating Case Temperature for Safety T _{c_s}	-40°C	-	+90°C	
Operating Case Temperature for Warranty T _{c_s}	-40°C	-	+75°C	5 years warranty case temperature Humidity: 10% to 95% RH

XCP Series-240W Outdoor Off-line Programmable Driver

Storage Temperature	-40°C	-	+85°C	Humidity: 5% to 100% RH
Dimensions (L*W*H)mm	L208.6W*68*H39			
Net Weight	1050±100g/PCS			
Package	L502mm*W372mm*H222mm; 15PCS/CtnGross weight: 16.2 KG			

DIMMING

Parameter		Min.	Typ.	Max.	Notes
0~10V Absolute Maximum Voltage on the Vdim (+) Pin		-	10V	-	
0~10V Source Current on Vdim(+)Pin		-	200uA	400uA	
Dimming Output Range	XCP-240M343	10% I _{max}	-	100% I _{max}	I _{max} =1.05A
	XCP-240M343	0.10	-	1.05	
Recommended Dimming Range for 1-10V		1V	-	10V	Default 0-10V/ PWM Dimming (0-10V, 0-9V, 0-5V, 0-3.3V and Forward and reverse dimming can be customized as request)
PWM_in High Level		9.7V	-	10.3V	
PWM_in Low Level		0V	-	0.3V	
PWM_in Frequency Range		300Hz	-	2KHz	
PWM_in Duty Cycle		1%	-	99%	

SAFETY STANDARDS

Safety Category	Country / Territory	Standards	Approved
CCC	China	GB19510.1, GB19510.14	√
CE	Europe	EN61347-1, EN61347-2-13	√
		EN62493	√
		EN62384	√
ENEC	CB Countries	IEC61347-1, IEC61347-2-13	√
CB	India	IS 15885(PART 2/SEC 13)	√
BIS	USA	UL 8750	√
UL	Canada	CSA C22.2 No.250.13	√
CUL	South Korea	K61347-1, K61347-2-13	
KC	Japan	J61347-1, J61347-2-13	
PSE	Australia	AS/NZS IEC 61347.2.13	
SAA		AS/NZS 61347.1	
EAC	Russia	ГОСТ Р МЭК 61347-1-2011	√
		ГОСТ IEC 61347-2-13-2013	
		ГОСТ IEC 62493-2014	
		СТБ EH 55015-2006	
		ГОСТ IEC 61547-2013	
		ГОСТ 30804.3.2-2013 (IEC 61000-3-2:2009)	
ГОСТ 30804.3.3-2013 (IEC 61000-3-3:2008)			

Isolation conditions

Insulation	Input/Mains	Dimming	LED Output	Case
Input/Mains	/	Double	Double	Basic
Dimming	Double	/	Basic	Basic
LED Output	Double	Basic	/	Basic
Case	Basic	Basic	Basic	/


EMC COMPLIANCE

EMC Category	Country / Territory	Standards	Approved
CCC	China	GB/T 17743, GB 17625.1	√
CE	Europe	EN 55015	√
		EN 61000-3-2, EN 61000-3-3	√
		EN61000-4-2,3,4,5,6,11	√
		EN 61547	√
KC	South Korea	K61547	
		K00015	
PSE	Japan	J55015	
FCC	USA	FCC part 15	√


NOTE:

This LED driver meets the EMI specifications above, but as a component of a luminaire, the end customer need to identify the EMI performance of a luminaire including the LED driver, other devices connected to the driver, and on the luminaire itself.


INRUSH CURRENT WAVEFORM

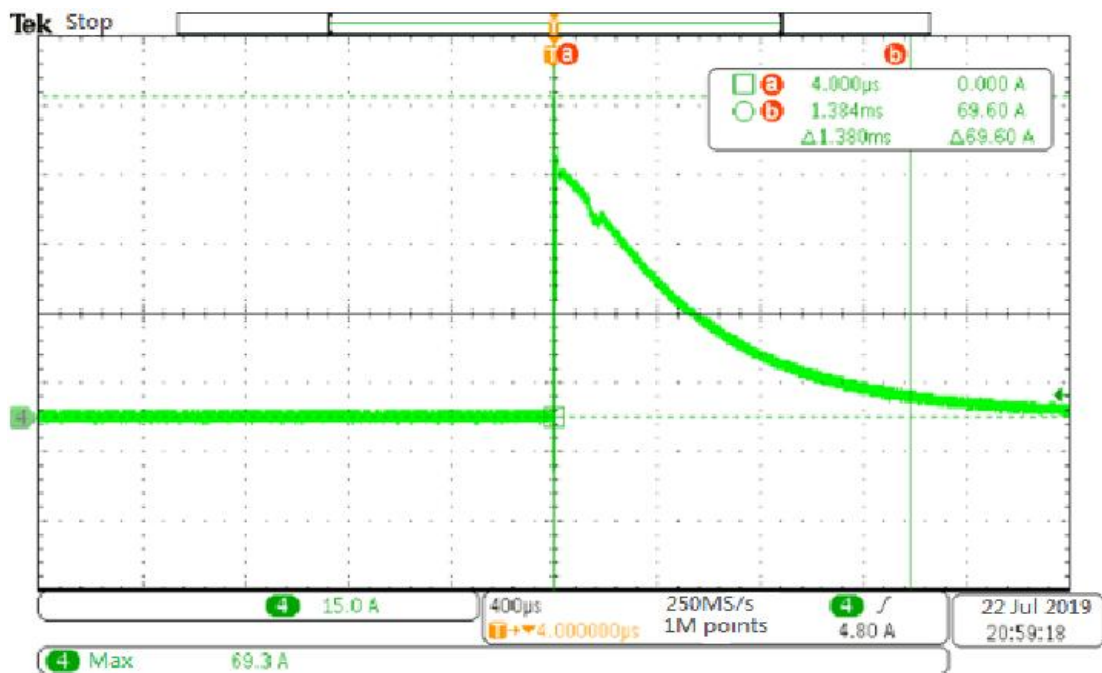


DERATING CURVE

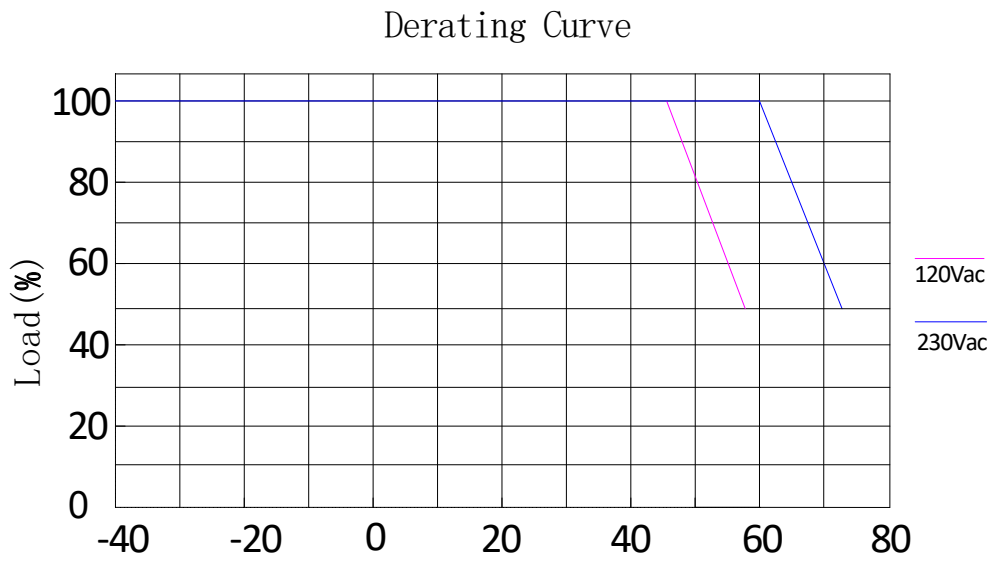

OUTPUT POWER VS INPUT VOLTAGE

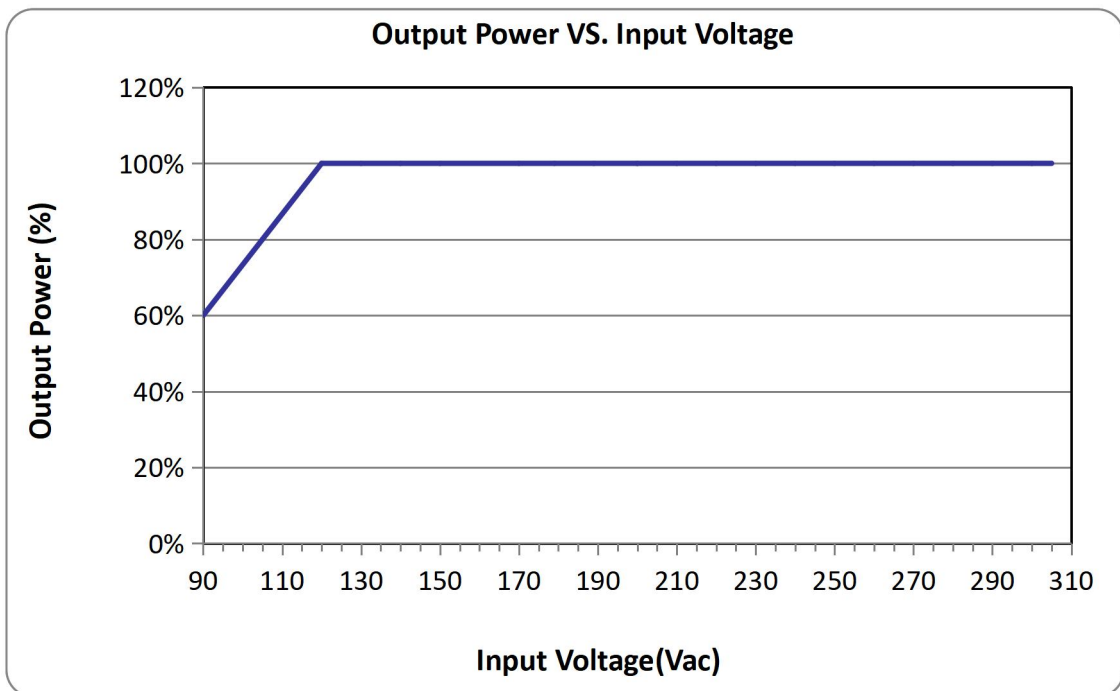


LIFETIME VS CASE TEMPERATURE

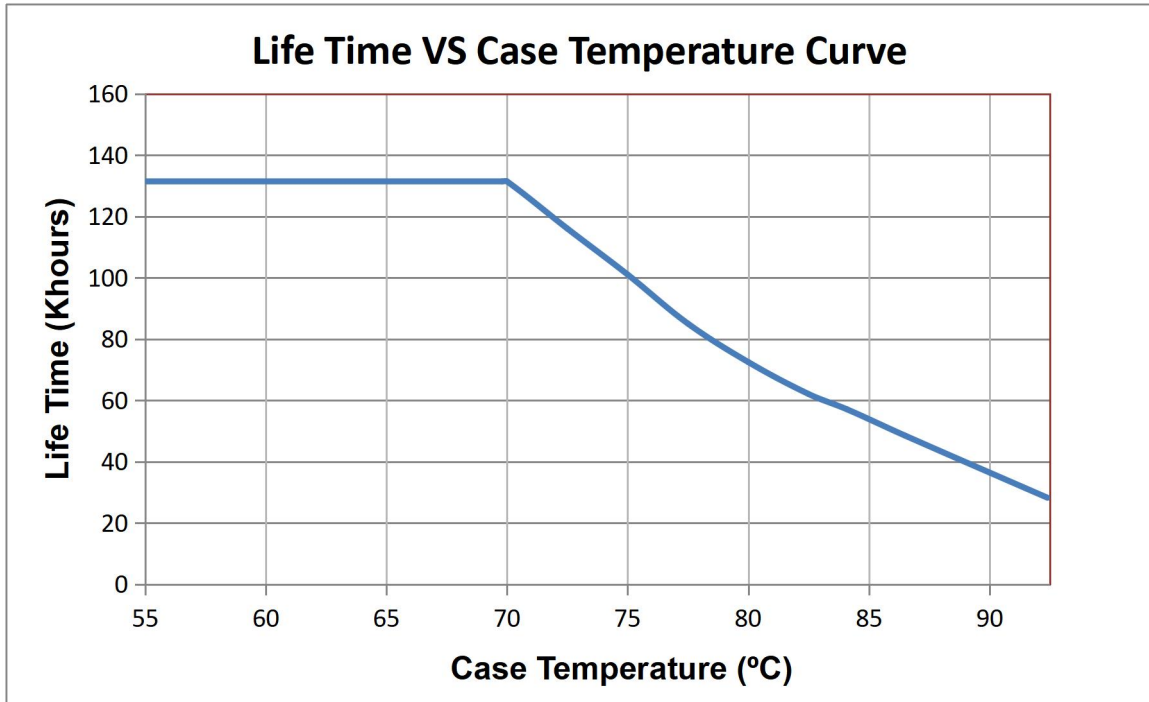


EFFICIENCY VS LOAD


Io=0.7

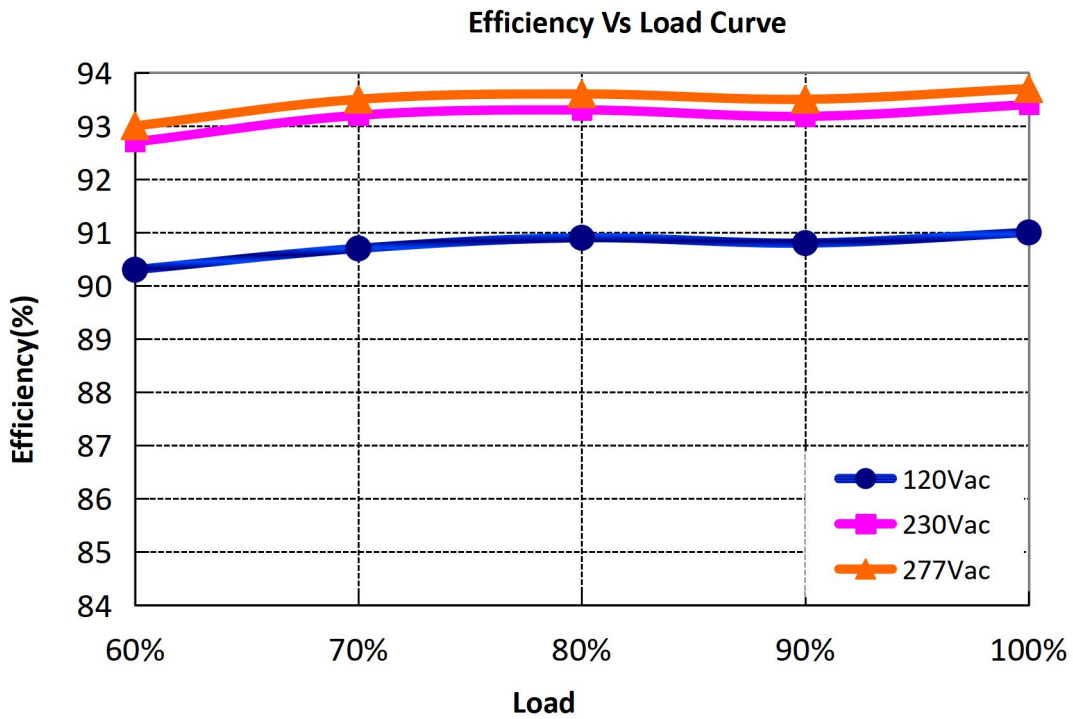


Io=1.05A

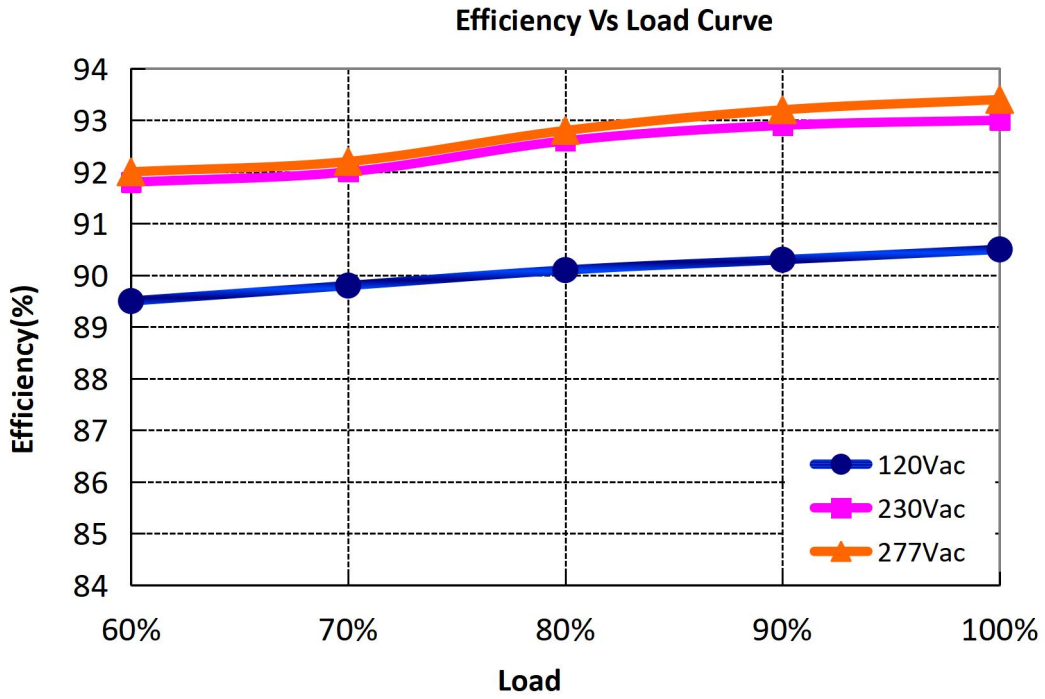

POWER FACTOR VS LOAD

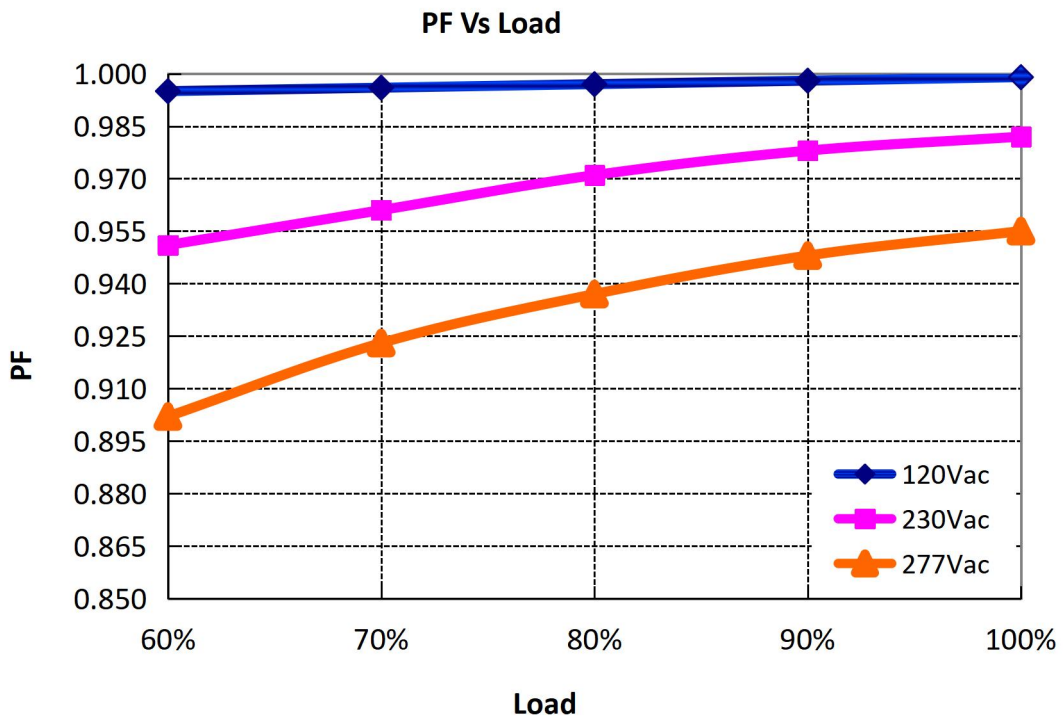


TOTAL HARMONIC DISTORTION

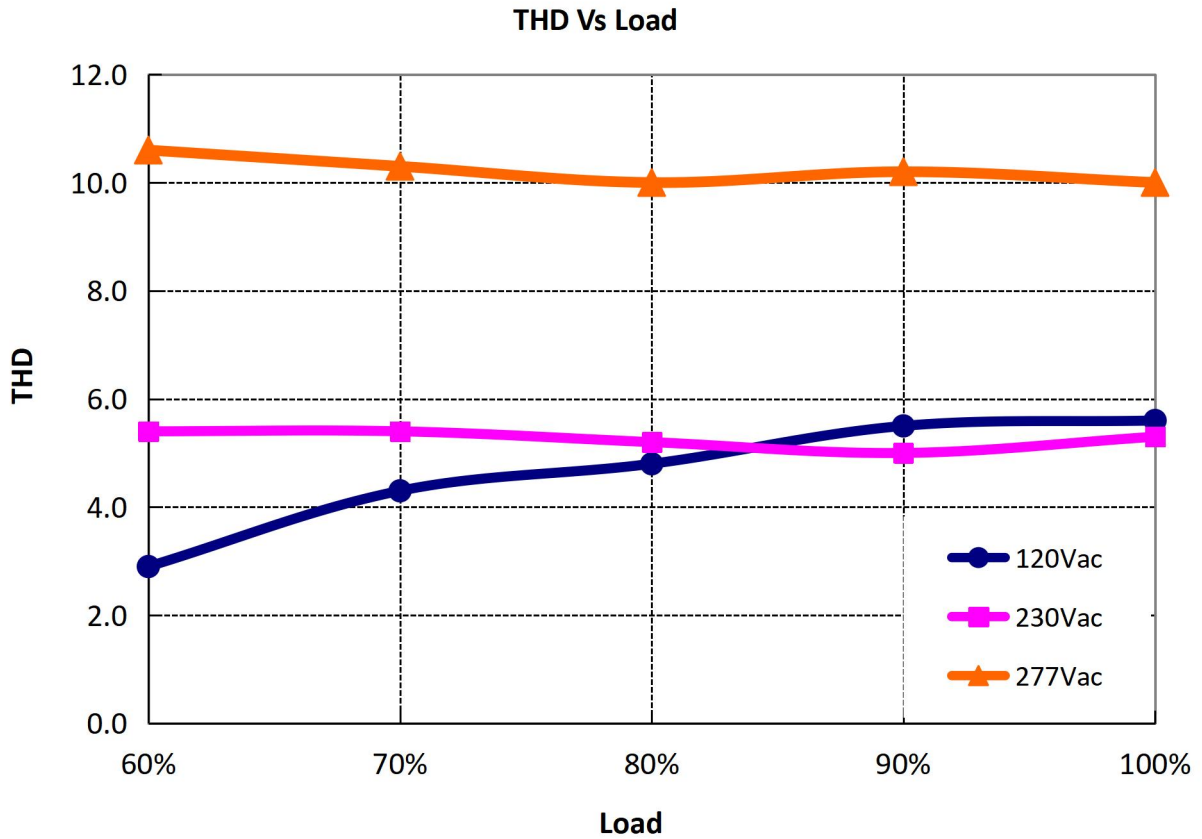

PROTECTIONS

Parameter	Notes
Over Temperature Protection	Decreases output current, returning to normal after over temperature is removed. The max derating could be met Max Temperature 85°C and Max Humidity 85%.
Short Circuit Protection	Constant current mode and auto recovery. No damage will occur when any output is short-circuited. The output shall return to normal when the fault condition is removed.
Output over Voltage Protection	Run into protection mode when output voltage exceeds limit, and return to normal when the fault is eliminated and restart the power supply..

0-10V/PWM DIMMING

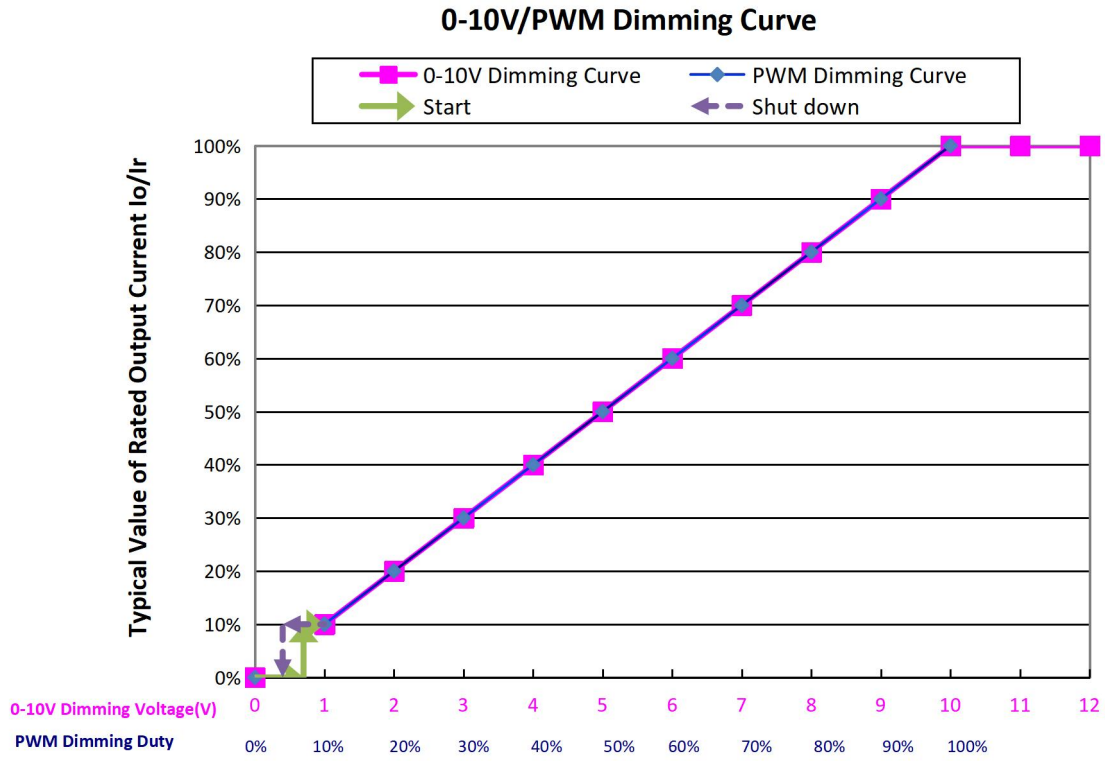


Note:





Dim to off model is realized by decreasing the output voltage, the power supply still has residual voltage when dim to off, so the start up voltage of the lamp should be higher than residual voltage.

MECHANICAL OUTLINE

XCP-240M343 Types

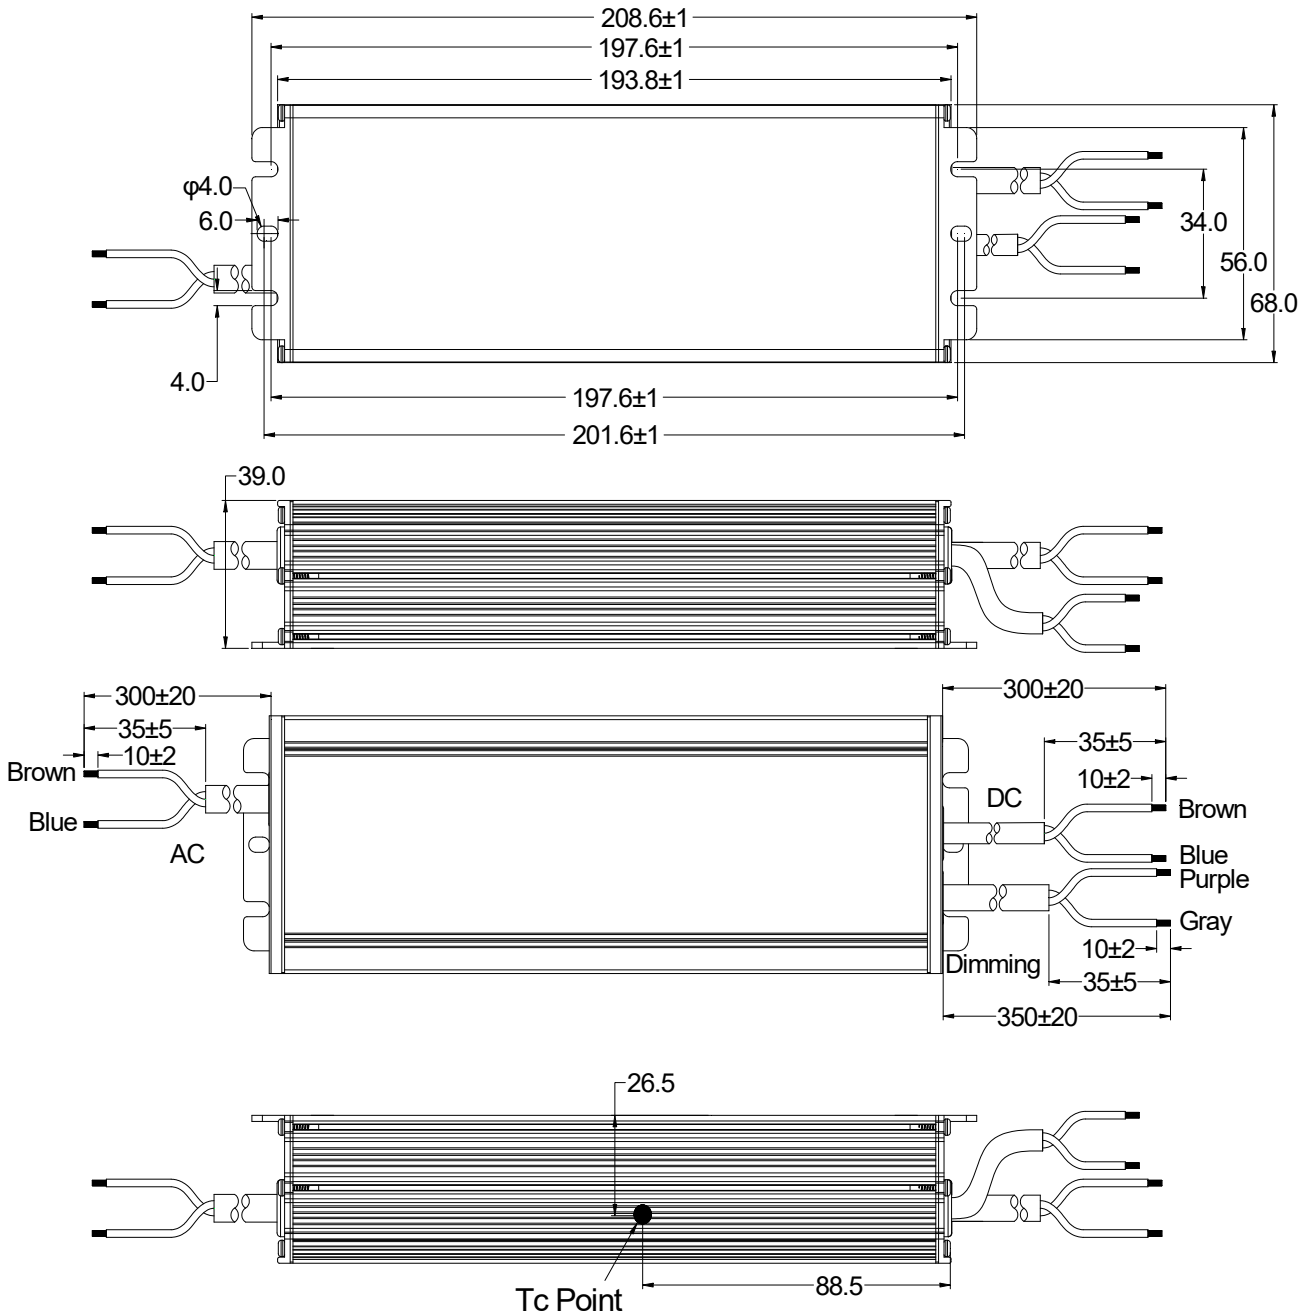

XCP-240V343 Types

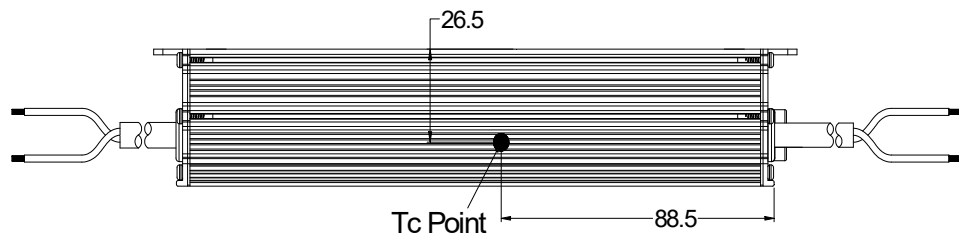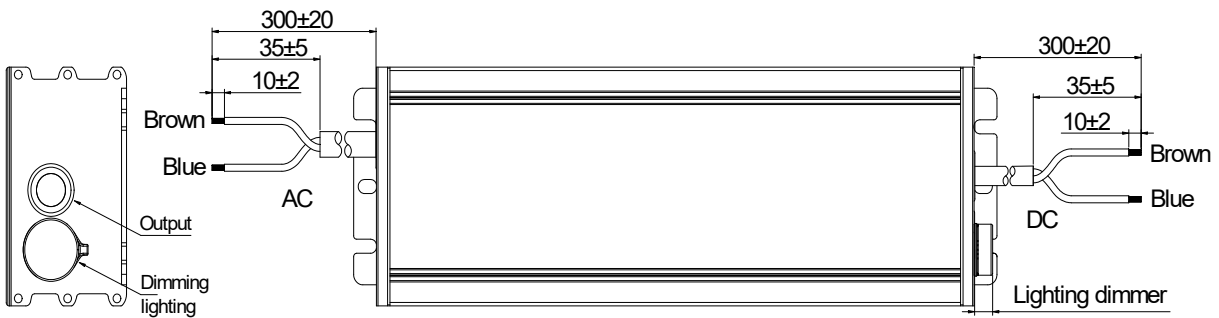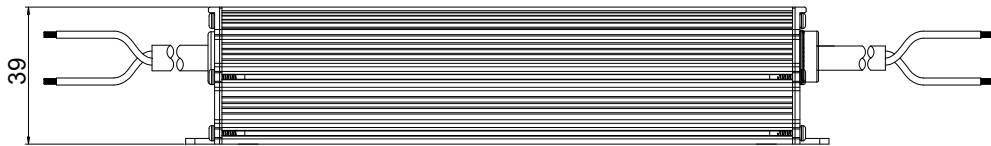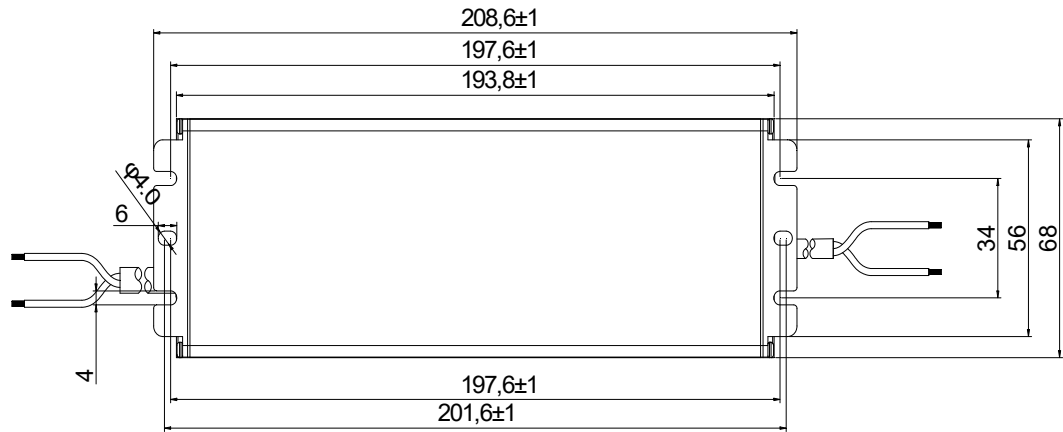













Wire	Specification	Note
Input	CCC+VDE H05RN-F *2C L=300±20mm	CCC/CE
Output	CCC+VDE H05RN-F *2C L=300±20mm	CCC/CE
Dimming	UL 2733 22AWG *2C L=350±20mm	Y = M

铭牌













XCP-240M343

183.00 mm

45.50 mm	INPUT	MOSO ® XCP-240M343 LED DRIVER						OUTPUT	
	L BROWN	INPUT	100-277V ~ 50/60Hz, 3.3A Max.PF:0.95						BROWN Vo +
	N BLUE	OUTPUT	171-343V== 0.10-1.05A Max: 360V== Max.Power:240W						BLUE Vo -
		$t_c: 90^{\circ}\text{C}$	$t_a: 50^{\circ}\text{C}$ Input:100-200V~ $t_a: 60^{\circ}\text{C}$ Input:200-277V~						PURPLE DIM +
		<small>MADE IN CHINA For LED module only</small>		<small>SHENZHEN MOSO ELECTRONICS TECHNOLOGY CO., LTD No.1061, Songbai Road, Xili Town, Nanshan District, Shenzhen, CHINA</small>					GRAY DIM -

XCP-240V343

183.00 mm

45.50 mm	INPUT	MOSO ® XCP-240V343 LED DRIVER						OUTPUT	
	L BROWN	INPUT	100-277V ~ 50/60Hz, 3.3A Max.PF:0.95						BROWN Vo +
	N BLUE	OUTPUT	171-343V== 0.53-1.05A Max: 360V== Max.Power:240W						BLUE Vo -
		$t_c: 90^{\circ}\text{C}$	$t_a: 50^{\circ}\text{C}$ Input:100-200V~ $t_a: 60^{\circ}\text{C}$ Input:200-277V~						Io ADJ (+)
		<small>MADE IN CHINA For LED module only</small>		<small>SHENZHEN MOSO ELECTRONICS TECHNOLOGY CO., LTD No.1061, Songbai Road, Xili Town, Nanshan District, Shenzhen, CHINA</small>					

Specification for Approval

Product Name: 240W outdoor off-line programmable driver
Product Model: XCP-240M343
XCP-240V343
Rev. G.3
Sample Date:

CUSTOMER AUTHORIZED SIGNATURE		
Tested By	Checked By	Approved By
(Company seal) Return one copy to MOSO with approved signature and company seal.		

XiLi Songbai Road 1061, Nanshan
Address: District, Shenzhen City, Guangdong Province, P.R.China Post Code: 518108
TEL: 0755-27657000 FAX: 0755-27657908
E-mail: info@mosopower.com Web site: http://www.mosopower.com

Prepared By	Checked By	Approved By

