

## Specification for Approval

Product Name: 160W Linear Non-isolated Driver

Product Model: N7C-160M260A12

Rev: D.2

Address: XILiSongbai Road 1061, Nanshan District, Shenzhen City, Guangdong, China

Tel: 0755-27657000

FAX: 755-27657908

E-mail: [info@mosopower.com](mailto:info@mosopower.com)

Web Site: <http://www.mosopower.com>

Prepared By	Checked By	Approved By

## Specification for Approval

Product Name: 160W Linear Non-isolated Driver

Product Model: N7C-160M260A12

Rev: D.2

CUSTOMER AUTHORIZED SIGNATURE		
Tested By	Checked By	Approved By
(Company seal)Return one copy to MOSO with approved signature and company seal.		

Address:XiLiSongbai Road 1061, Nanshan District, Shenzhen City, Guangdong, China

Tel: 0755-27657000

FAX: 755-27657908


E-mail:[info@mosopower.com](mailto:info@mosopower.com)

Web Site:<http://www.mosopower.com>

Prepared By	Checked By	Approved By

## Description

The N7C series is specifically designed for industrial lighting applications, non-isolated design, operating in constant current with high power factor and a universal input voltage range of 108-380Vac. With 0-10V/PWM/ resistance dimming. The compact housing and high efficiency allow the drivers to operate with high reliability, while featuring input surge, output over voltage, short circuit and over temperature protection.

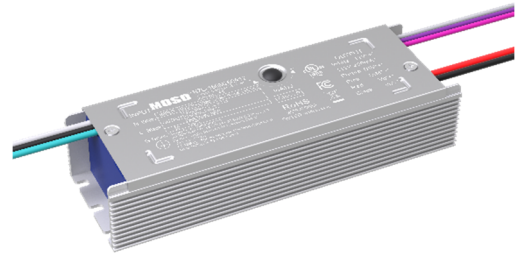

## Product Features

- Universal input voltage: 108-380Vac;
- Rated Input voltage: 120-347Vac;
- Constant current design, Efficiency up to 94%;
- 3-in-1 dimmable: 0-10V / PWM / Resistor;
- Dim-to-off without afterglow;
- High surge protection: DM: 6KV, CM: 6KV;
- 12V/0.2A auxiliary power supply;
- Output and Dimming Signal Isolating;
- Protections: SCP / OVP / OTP;
- 5 years warranty;

## Application

Linear high bay light  
Flood light  
Wall Pack light  
Shoebox light

## Models

Model Number	Input Voltage Range (Vac)	Max Output Power (W)	Output Voltage Range (Vdc)	Output Current Adjustable Range (A)	Default Current(A)	Eff. (Typ.)	PF(Typ.)	THD(Typ.)
N7C-160M260A12	108-380	160	180-260	0.52-0.74	0.66	94%	0.97	10%

Notes:

[1]. All specifications are measured at 25°C ambient temperature, input voltage 277Vac, and the typical value tested at full load, if no specific note.

## Input Specifications

Parameter	Min	Typ.	Max	Notes
Input Voltage Range	108Vac	-	380Vac	
Rated Input voltage	120Vac	-	347Vac	Refer to Output Power vs. Input Voltage curve
Input Frequency AC	47Hz	50/60Hz	63Hz	
Max Input Current	-	-	2.0A	120Vac & 100% load
Max Input Power	-	-	185W	120Vac & 100% load
Leakage Current	-	-	0.75mA	UL 8750; 347Vac/60Hz
Inrush Current	-	-	45A	120Vac, 100% load
Inrush Current	-	-	75A	220Vac, 100% load
Inrush Current	-	-	120A	347Vac, 100% load
Power Factor (PF)	0.90	0.97		120-347Vac , 50/60Hz , 80%-100% load
Total Harmonic Distortion (THD)	-	10%	20%	120-277Vac , 50/60Hz , 80%-100% load
MCB(B16)	-	12	-	220Vac; 100%load

## Output Specifications

Parameter	Min	Typ.	Max	Notes
Output Voltage Range	180Vdc	-	260Vdc	
Open Circuit Voltage	-	-	310Vdc	
Output Current Range	0.52A	-	0.74A	Adjustable output current with potentiometer
Full Power Current Range	0.62A	-	0.74A	P=U*I=160W, 100%load
Current Accuracy	-8%	-	+8%	
Total Output Current Ripple	-	10%	15%	20MHz BW full load & LED load the LED load ripple is slightly different for different LEDs
Startup Overshoot Current	-	-	10%	120-347Vac full load condition, LED load
Auxiliary Source Output Voltage	10.8V	12V	13.8V	
Auxiliary Source Output Current	-	-	200mA	
Line Regulation	-5%	-	+5%	25°C±10°C ambient temperature, input changes from 120Vac to 347Vac
Load Regulation	-5%	-	+5%	Load varies from 70% to 100% with 120-347Vac Input at 25°C±10°C ambient temperature
Turn-on Delay Time	-	-	1s	120Vac, 100% load
Turn-on Delay Time	-	-	1s	277Vac, 100% load
Turn-on Delay Time	-	-	1s	347Vac, 100% load

## General Specifications

Parameter	Min	Typ.	Max	Notes
Efficiency@120Vac	91%	92%	-	100% load, No load of auxiliary source
Efficiency@277Vac	92%	93%	-	100% load, No load of auxiliary source
Efficiency@347Vac	92%	94%	-	100% load, No load of auxiliary source
Mean Time Between Failure	-	200Khours	-	25°C±10°C ambient temperature , 230Vac , 80% load condition (MIL-HDBK-217/SR-332)
Lifetime	-	50Khours	-	230Vac & 100% load , Tc 80°C , refer to lifetime vs. case temperature curve
Operating Tc for Safety Tc_s	-40°C	-	+90°C	
Operating Tc for Warranty Tc_w	-40°C	-	+80°C	5-year warranty shell temperature, humidity: 10% to 90% RH, Non-condensing
Storage Temperature Ta	-40°C	-	+85°C	Humidity: 5% to 95% RH, Non-condensing
Altitude	-60m	-	4000m	
Over Temperature Protection Tc	90°C	95°C	100°C	Decreases output current, returning to normal after over temperature is removed.
Short Circuit Protection	-	-	15W	Constant current mode. The output shall return to normal when the fault condition is removed.
Dimensions (L*W*H)	159*53*34mm			
Net Weight	510±50g/PCS			
Package (L*W*H)	500*310*160mm; 24PCS/Ctn., Gross Weight: 13Kg			

## Dimming

Parameter	Min	Typ.	Max	Notes
Absolute Maximum Voltage	-	10V	15V	On the Vdim (+) Pin
Source Current on Vdim (+)Pin	-	100uA	200uA	
Dimming Range	10% I <sub>o max</sub>	-	100% I <sub>set</sub>	I <sub>set</sub> =0.52-0.74A
Suggest Dimming Input 0-10V	0V	-	10V	
Turn-on Voltage	1.0V	-	1.3V	
Turn-off Voltage	0.6V	-	1.0V	
PWM in High Level	9.7V	-	10.3V	
PWM in Low Level	0V	-	0.3V	
PWM in Frequency Range	1KHz	-	2KHz	
PWM in Duty Cycle	1%	-	99%	
Turn-on Duty Cycle	10%	-	13%	
Turn-Off Duty Cycle	6%	-	10%	
Resistor Range	0	-	100KΩ	

## Safety Specification

Parameter	Min	Typ.	Max	Notes
Dielectric Strength ( Input-Ground )	-	1700Vac	-	60s , Current not exceeding 5mA
Dielectric Strength ( Input-Dimming )	-	1700Vac	-	60s , Current not exceeding 5mA
Grounding Resistance	-	-	0.1Ω	25°C±10°C Ambient Temperature, pass 30A Current, 120s.
Insulation Resistance	10MΩ	-	-	Input -PE, 500Vdc/60s/25°C

## Safety Compliance

Safety Category	Standards	Approved	Notes
CCC	GB19510.1,GB19510.14		
CE	EN61347-1, EN61347-2-13, EN62493		
ENEC	EN61347-1, EN61347-2-13, EN62384		
CB	IEC61347-1, IEC61347-2-13		
BIS	IS 15885(PART 2/SEC 13)		
UL	UL 8750	√	
CUL	CSA C22.2 No.250.13	√	
KC	K61347-1, K61347-2-13		
PSE	J61347-1, J61347-2-13		
SAA	AS/NZS IEC 61347.2.13		
SAA	AS/NZS 61347.1		


## EMC Compliance

EMC Category	Standards	Approved	Notes
CCC	GB/T 17743, GB 17625.1		
CE	EN 55015		
CE	EN 61000-3-2, EN 61000-3-3		
CE	EN61000-4-2,3,4,5,6,11		
CE	EN 61547		
KC	K61547		
KC	K00015		
PSE	J55015		
FCC	FCC part 15	√	CLASS A
Surge Shock Immunity	ANSI/C82.77-5-2017		
	IEC/EN 61000-4-5		
Ringing Wave	IEC/EN 61000-4-12		
	ANSI/IEEE C62.41.2		

## RoHS


Our products comply with reference to RoHS Directive (EU) 2015/863 amending 2011/65/EU.

**Inrush Current**

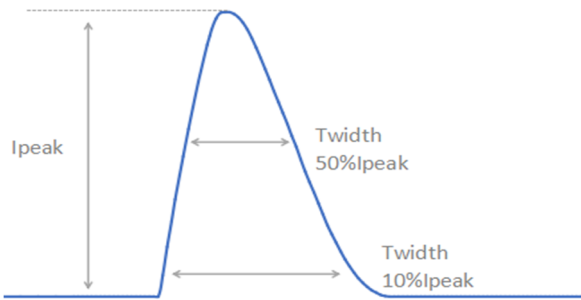


$V_{in}$	$I_{peak}$	$T(@\ 10\% \text{ of } I_{peak})$	$T(@\ 50\% \text{ of } I_{peak})$
220Vac	75A	270 $\mu$ s	130 $\mu$ s

**Output Voltage vs. Output Current**

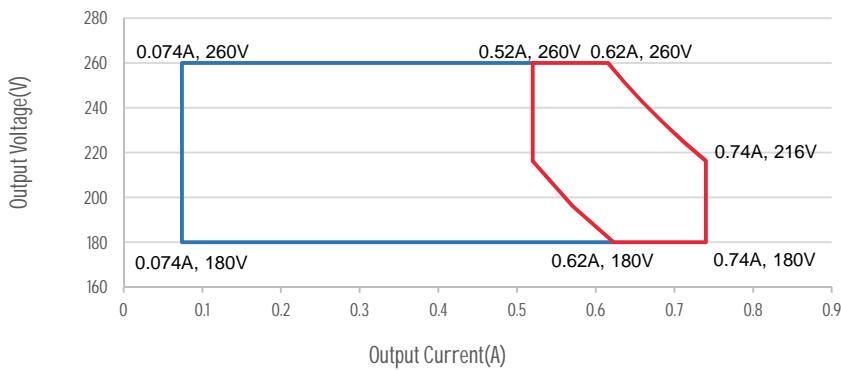


Red curve: good performance area


**Output Power vs. Input Voltage**

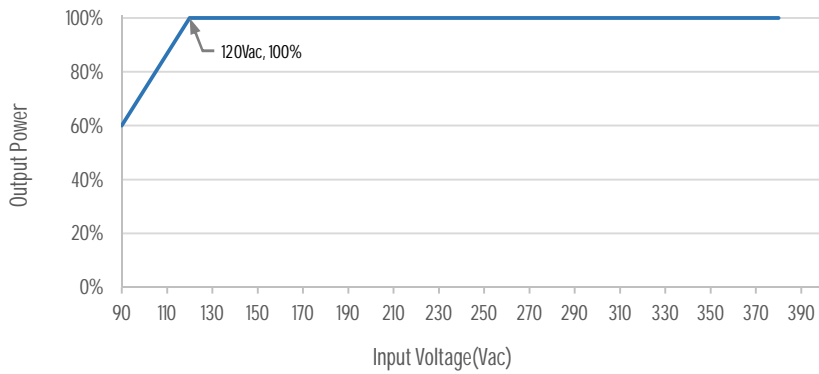


**Efficiency vs. Load**

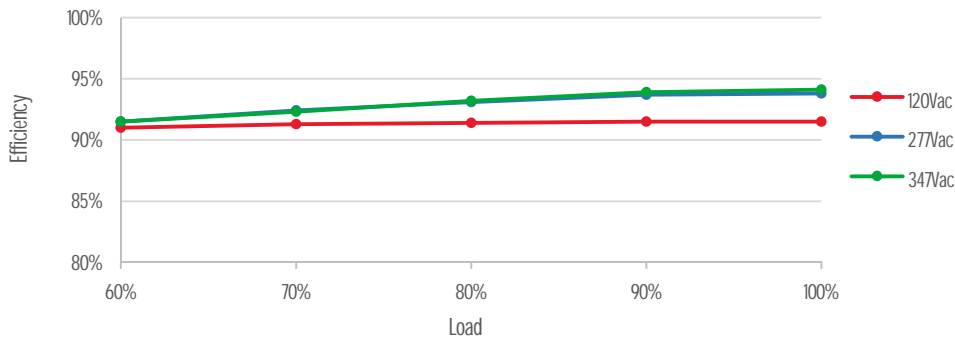


**PF vs. Load**

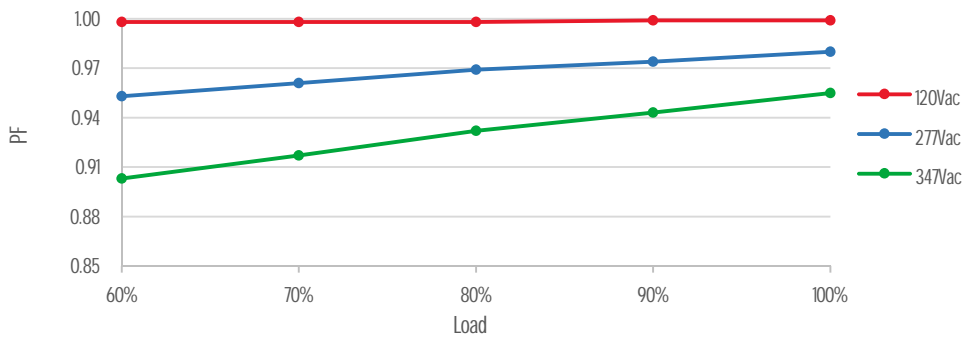

**THD vs. Load**

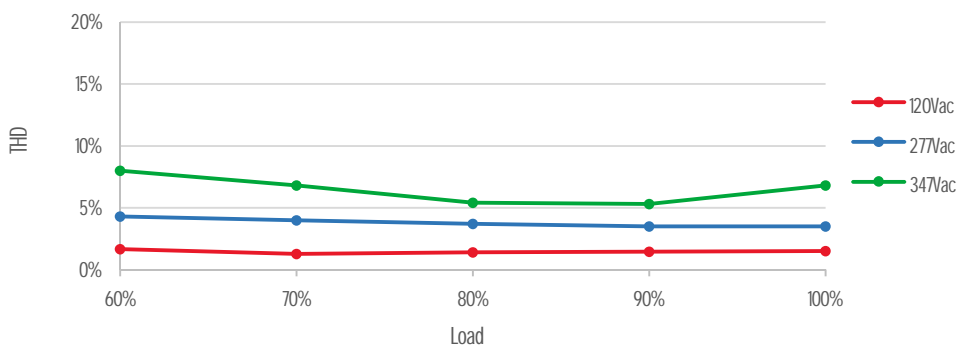


**Output Power vs. Case Temperature**

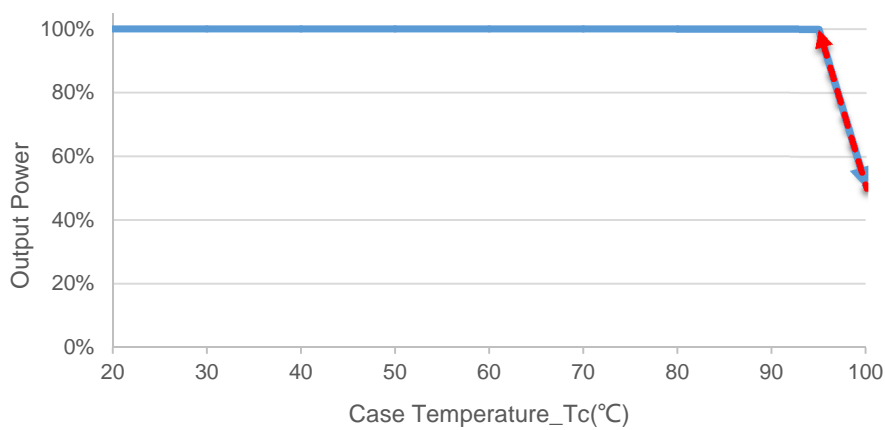





### Lifetime vs. Case Temperature

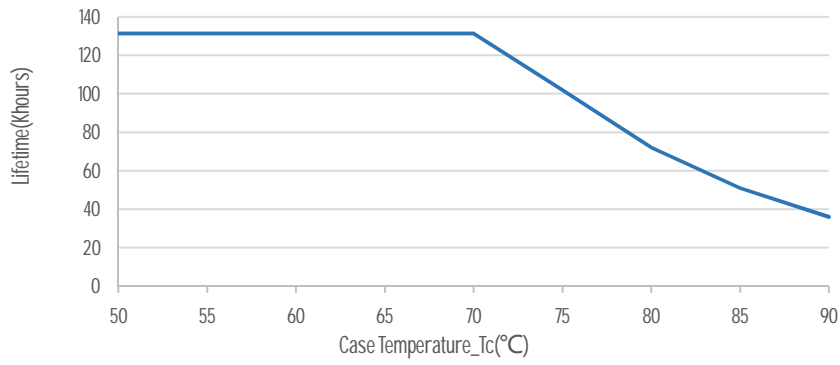

### 0-10V/PWM/Resistor Dimming

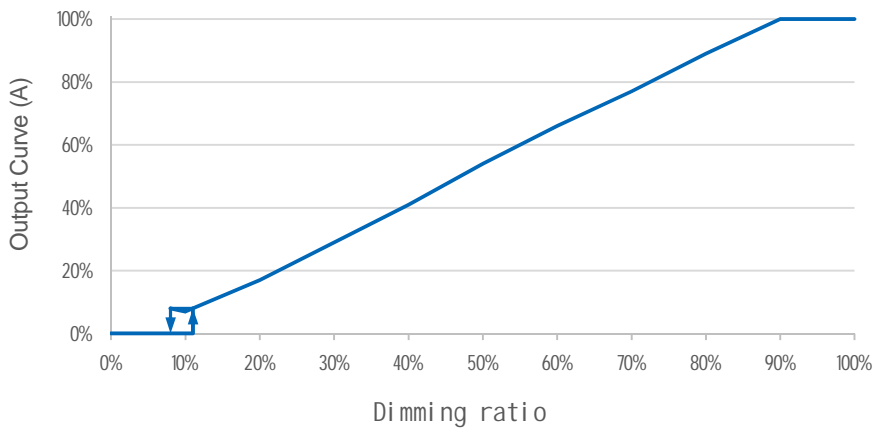

Mechanical Outline

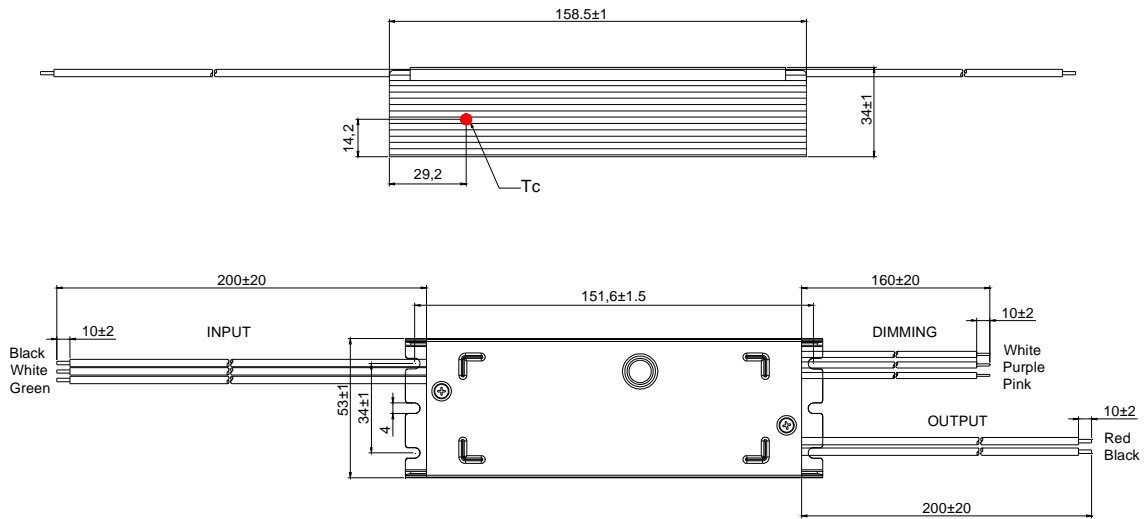

Notes:

- [1]. In order to meet the requirements of the "derating curve" and "maximum ambient temperature of 50 °C", it is necessary to add auxiliary heat dissipation devices with a recommended heat dissipation area of 380cm<sup>2</sup> and the volume is 115cm<sup>3</sup>; It is also necessary to add thermal conductive silicone grease between the heat sink and LED driver to ensure a tight fit with the auxiliary heat sink.
- [2]. The pressure resistance of LED beads and aluminum substrate should be greater than 2KVac.

Specification

Input	UL 1015 18AWG L=200±20mm Tin-dip length 10±2mm	UL
Output	UL 1015 18AWG L=200±20mm Tin-dip length 10±2mm	UL
Dimming	UL 1015 22AWG L=160±20mm Tin-dip length 10±2mm	UL

Label

**INPUT** **MOSO**<sup>®</sup> N7C-160M260A12  
Constant current type LED driver  
Integrated SPD

INPUT	120-347V~ 50/60Hz. 1.7A Max. PF: 0.9C-0.95. 185W
OUTPUT	180-260V== 0.52-0.74A Uout Max: 310V== Max Power: 160W
tc	90°C

Suitable for Dry, Damp locations  
SHENZHEN MOSO ELECTRONICS TECHNOLOGY CO., LTD  
No.1061, Songbai Road, Xili Town, Nanshan District,  
Shenzhen, CHINA  
CLASS P: "For connections Use Wire Rated for at  
Least 90°C(194°F)or equivalent

+

-

**OUTPUT**

White 12V"+"  
(12V 200mA)

Purple DIM"+"

Pink DIM"-"

Red Vo"+"

Black Vo"-"

IoADJ

Class P

RoHS  
MADE IN CHINA  
For LED module only

Version

A.1	First release	2024-03-13
B.3	ECL202403028	2024-04-09
C.2	ECL202412005	2024-12-03
D.2	ECL202412025	2024-12-09