



Product Features:

- Input voltage range: 176~264Vac;
- Constant power design;
- External NTC;
- Dimming: DALI-2 & VMF, Dim to off;
- NFC programmable;
- Constant Lumen Output (CLO);
- End-of-life warning;
- Suitable for luminaires of protection class I and II;
- Auxiliary power supply: 24V/250mA;
- Surge protection: 6KV line-line, 10KV line-earth;
- Multiple protection: SCP, OVP(Output), OTP;
- Meet the zhaga Book 13;
- IP20;
- 7 Years Warranty

Application

- Suitable for LED roadway lighting, plant lighting, industrial lighting, landscape lighting, etc.

DESCRIPTION

U6 series is an ultra-high efficiency DALI programmable IP20 outdoor constant current drive power, input voltage range 176-264 Vac. Designed for European street lamps, compatible Class I & Class II. U6 series has lightning protection, input over-voltage protection, output over-voltage protection, short-circuit protection and over-temperature protection.

MODELS


Model Number [1]	Max Output Power (W)	Output Voltage Range (Vdc)	Full Power Output Voltage Range (Vdc)	Full Power Current Adjustable Range (A) [2]	Default Output Current Setting(A)	Typical Efficiency [3]	PF
U6-080D115	80	35-115	77-115	0.7-1.05	0.7	93%	0.97

Notes:

[1]. All performance parameters are at 25 degrees ambient temperature 230 Vac input, full load conditions measured typical values, except specified

[2]. When the power supply reaches the set life(example 70000H), when the power supply is restarted, The output current remains constant 10%Io, Or output flashing warning to indicate that the power supply needs to be replaced.

OPERATING AREA

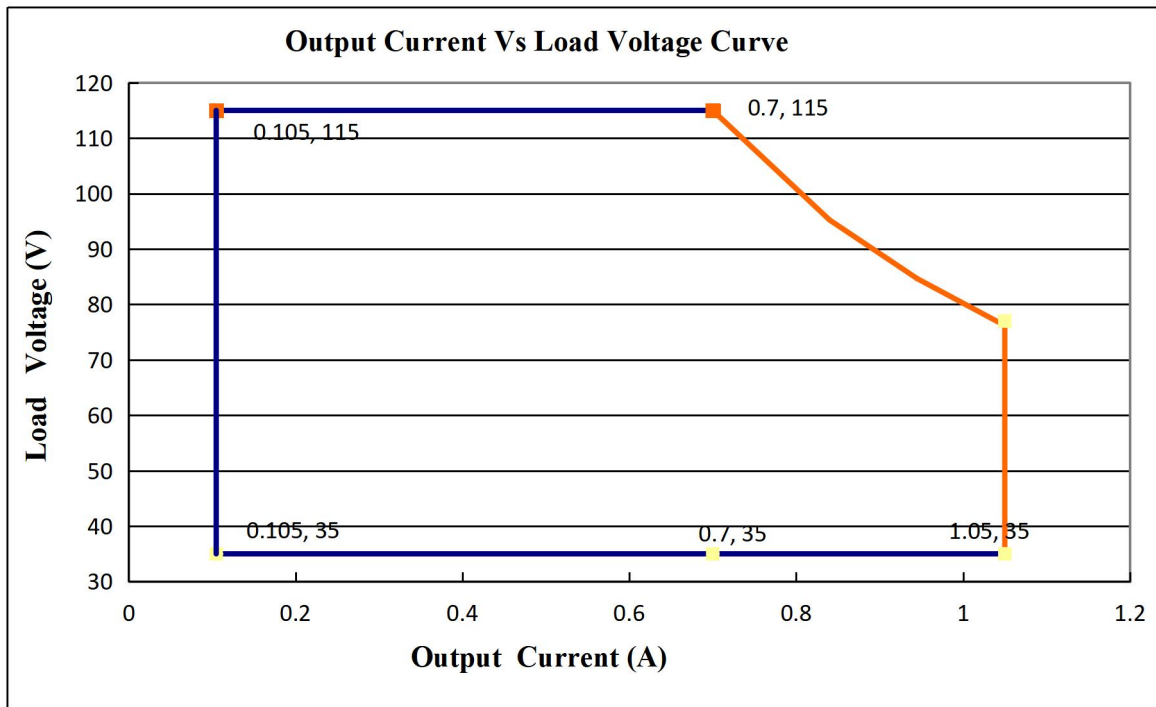

INPUT SPECIFICATIONS

Parameter	Min.	Typ.	Max.	Notes			
Input Voltage	176Vac	200-240Vac	264Vac				
Input Frequency	47Hz	50/60	63Hz				
Leakage Current	-	-	0.7mA	240Vac/60Hz			
Input AC Current	-	-	0.65A	200-240Vac & full load			
Inrush Current	-	-	75A	230Vac & full load			
Standby Power Consumption			0.5W	230Vac/50Hz			
Power Factor	0.95	0.96		240Vac, 50-60Hz, & full load			
	0.90	0.92		200-240Vac, 50-60Hz, 60%-100% load			
THD	-	5%	10%	200-240Vac, 50-60Hz, 60%-100% load			
Max. NO. of PSUs on Circuit Breaker	B10	6	B16	10	B25	15	230Vac 100% load
	C10	10	C16	16	C25	25	

OUTPUT SPECIFICATIONS

Parameter	Min.	Typ.	Max.	Notes
Output Current Tolerance	-5%	-	5%	Iset>0.35A
Output Current Setting Range (A) U6-080D115	10%	-	100%	
Output Current Setting Range with Constant Power U6-080D115	0.7	-	1.05	
Total Output Current Ripple(pk-pk)	-	10%	15%	20MHz BW, full load& LED load, the ripple would be tiny different under different LED load.
Startup Overshoot Current	-	-	10%	200~240Vac & 100% Load, load is LED
No Load Output Voltage(V) U6-080D115	-	-	130V	
Auxiliary Power Supply	22.8V	24V	25.2V 250MA	176-264Vac
Line Regulation	-1%	-	1%	25°C±10°C ambient temperature, input voltage changes from 200Vac to 264Vac.
Load Regulation	-3%	-	3%	25°C±10°C ambient temperature, Input Voltage 230Vac, load changes from 60% to 100%.
Turn-on Delay Time	-	-	1.5S	230Vac, 100% load

GENERAL SPECIFICATIONS

Parameter	Min.	Typ.	Max.	Notes
Efficiency @230Vac U6-080D115 Io=0.7A Io=1.05A	91% 91%	92% 92%		Measured at full load and 25°C ambient temperature
Dielectric Strength	Input-Output	-	3750Vac	-
	Input-PE	-	3000Vac	-
	Output-PE	-	1600Vac	-
Insulation Resistance	10MΩ	-	-	Input-Output, 500Vdc/60S/25°C /70%RH
MTBF	-	200000Hrs	-	25°C±10°C ambient temperature, 230Vac, 80% load (MIL-HDBK-217F)
Lifetime	-	100000Hrs	-	230Vac&100% load, 75°C case temperature, refer to lifetime curve for details
Ambient Temperature	-40°C		+55°C	230Vac&100% load
Operating Case Temperature for Safety Tc_s	-40°C	-	+85°C	
Operating Case Temperature for Warranty Tc_s	-40°C	-	+75°C	7 years warranty case temperature Humidity: 10% to 95% RH No

Storage Temperature	-40°C	-	+85°C	condensation Humidity: 5% to 85% RH No condensation
Dimensions (L*W*H)mm	133L*77W*40H			
Net Weight	500±50g/PCS			
Package	L555mm*W375mm*H235mm; 30PCS/Ctn			

DIMMING

Parameter		Min.	Typ.	Max.	Notes
DALI 2	DA,DA High Voltage Level	9.5	16	22.5	
	DA,DA Low Voltage Level	-6.5	0	6.5	
Dimming Output Range	U6-080D115	10%Iset	-	100%Iset	I _{max} =1.05A

SAFETY STANDARDS

Safety Category	Country / Territory	Standards	Approved
CCC	China	GB19510.1, GB19510.14	√
CE	Europe	EN61347-1, EN61347-2-13	√
		EN62493	√
		EN62384	√
CB	CB Countries	IEC61347-1, IEC61347-2-13	√
BIS	India	IS 15885(PART 2/SEC 13)	

EMC COMPLIANCE

EMC Category	Country / Territory	Standards	Approved
CCC	China	GB/T 17743, GB 17625.1	√
CE	Europe	EN 55015	√
		EN 61000-3-2, EN 61000-3-3	√
		EN61000-4-2,3,4,5,6,11	√
		EN 61547	√

INSULATION

Insulation	Input/Mains	DALI	LED Output	Supporting Surface	Auxiliary Power Supply
Input/Mains	/	Double	Double	Double	Double
DALI	Double	/	Basic/Supplementary	Double	Basic/Supplementary
LED Output	Double	Basic/Supplementary	/	Double	Basic/Supplementary
Supporting Surface	Double	Double	Double	/	Double
Auxiliary Power Supply	Double	Basic/Supplementary	Basic/Supplementary	Double	/


DALI2 Standards

IEC62386-101,102,207


NOTE:

This LED driver meets the EMI specifications above, but as a component of a luminaire, end customer need to identify the EMI performance of a luminaire including LED driver, other devices connected to the driver and on the luminaire itself.


INRUSH CURRENT WAVEFORM

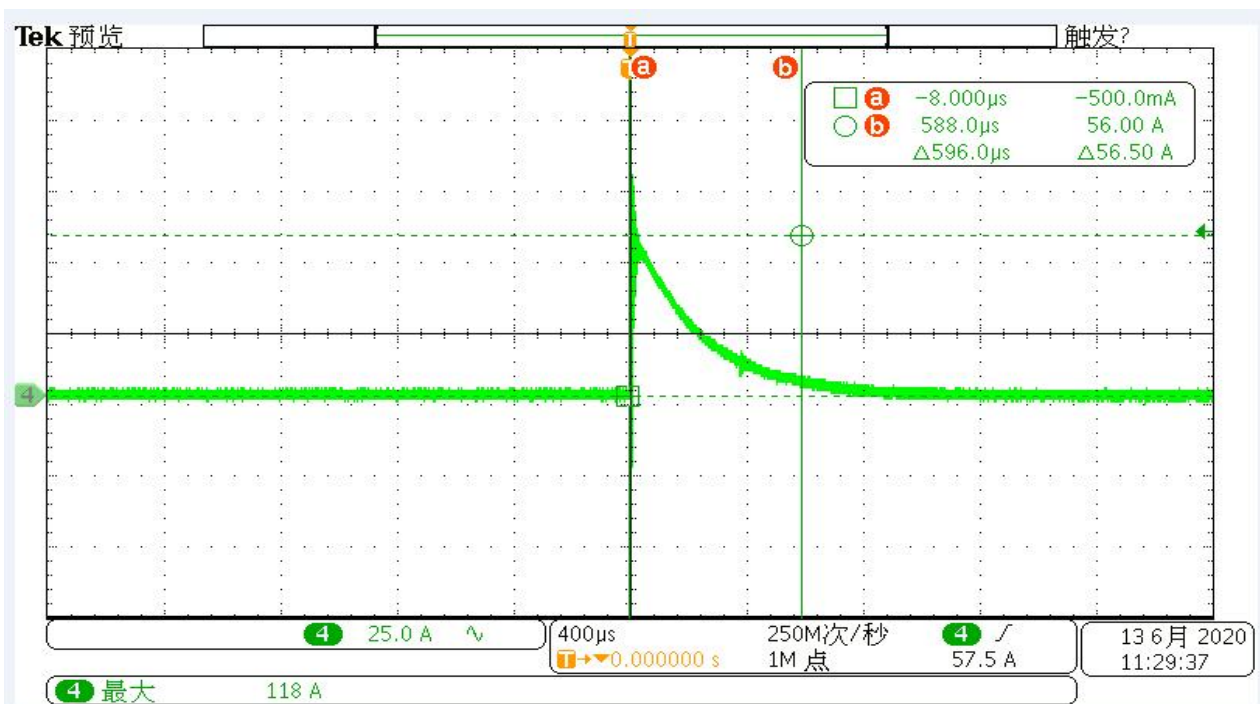


DERATING CURVE

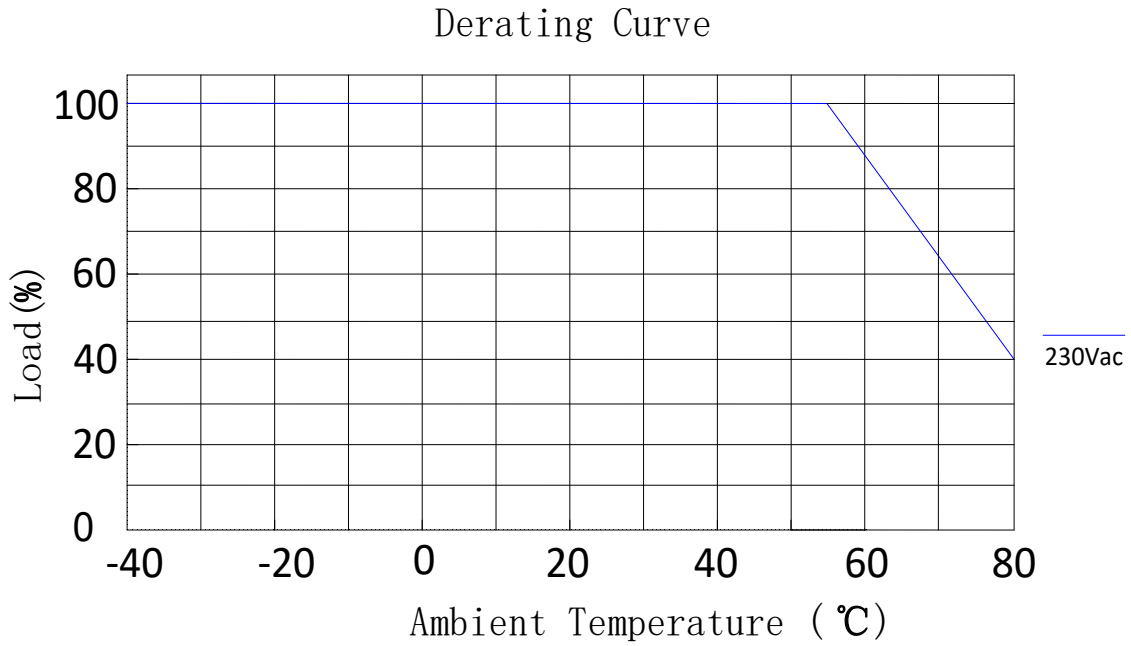


OUTPUT POWER VS INPUT VOLTAGE

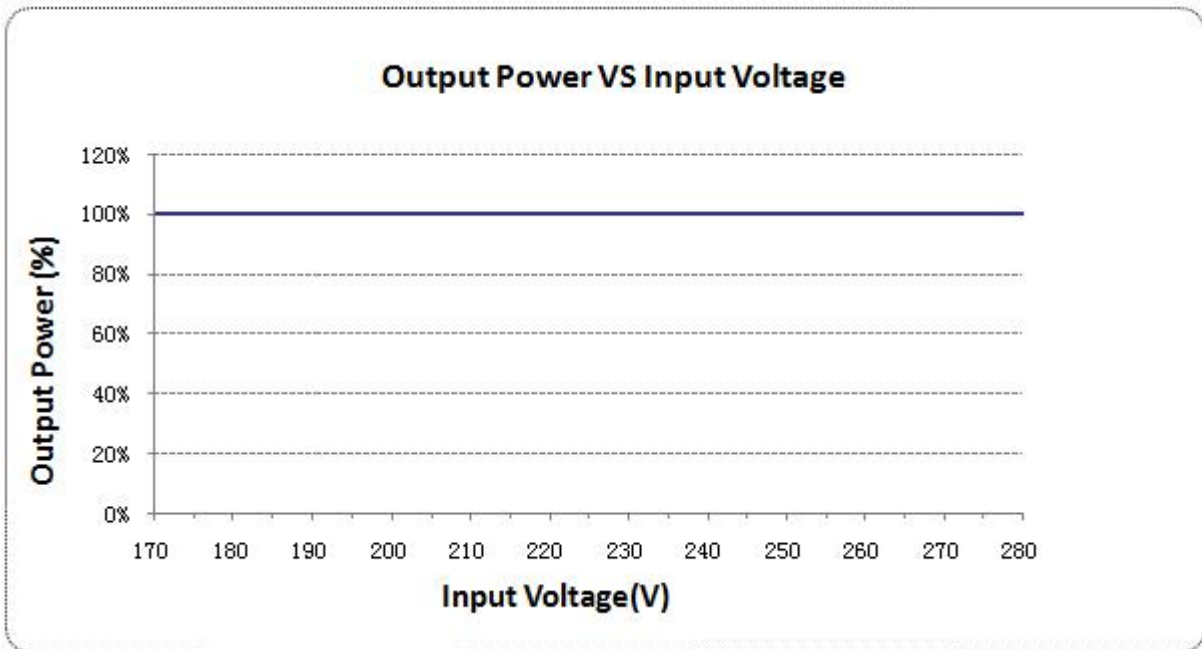


LIFETIME VS CASE TEMPERATURE

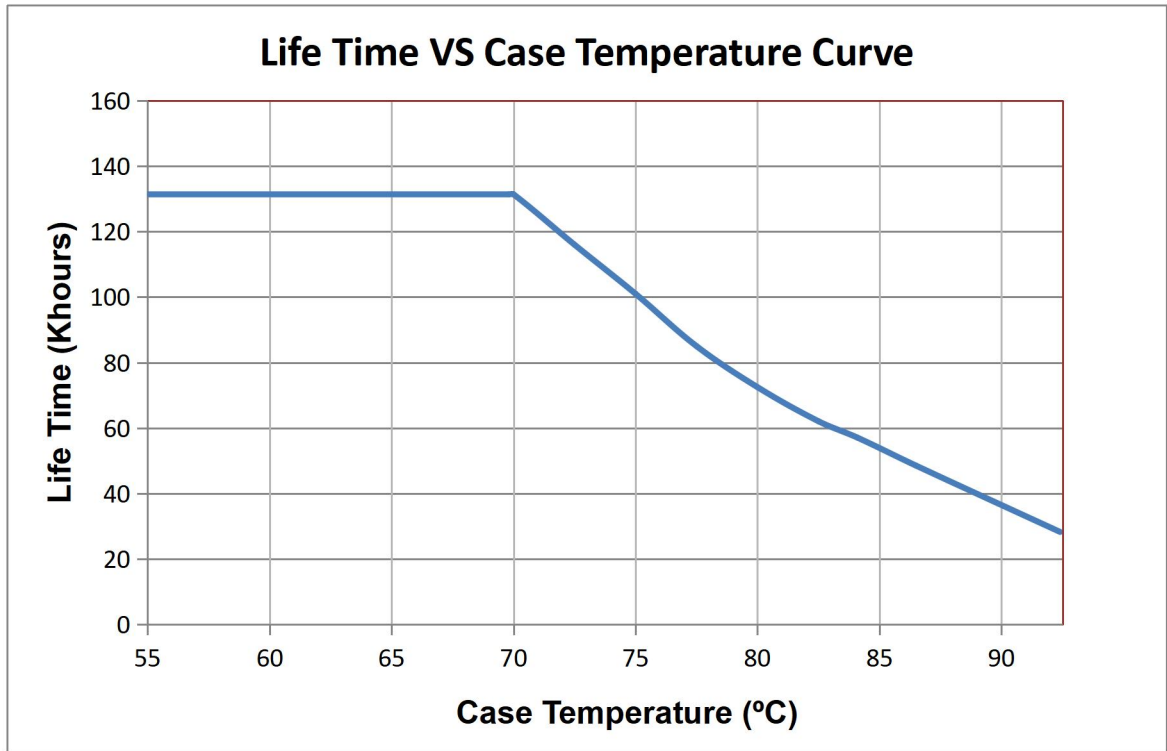

POWER FACTOR VS LOAD

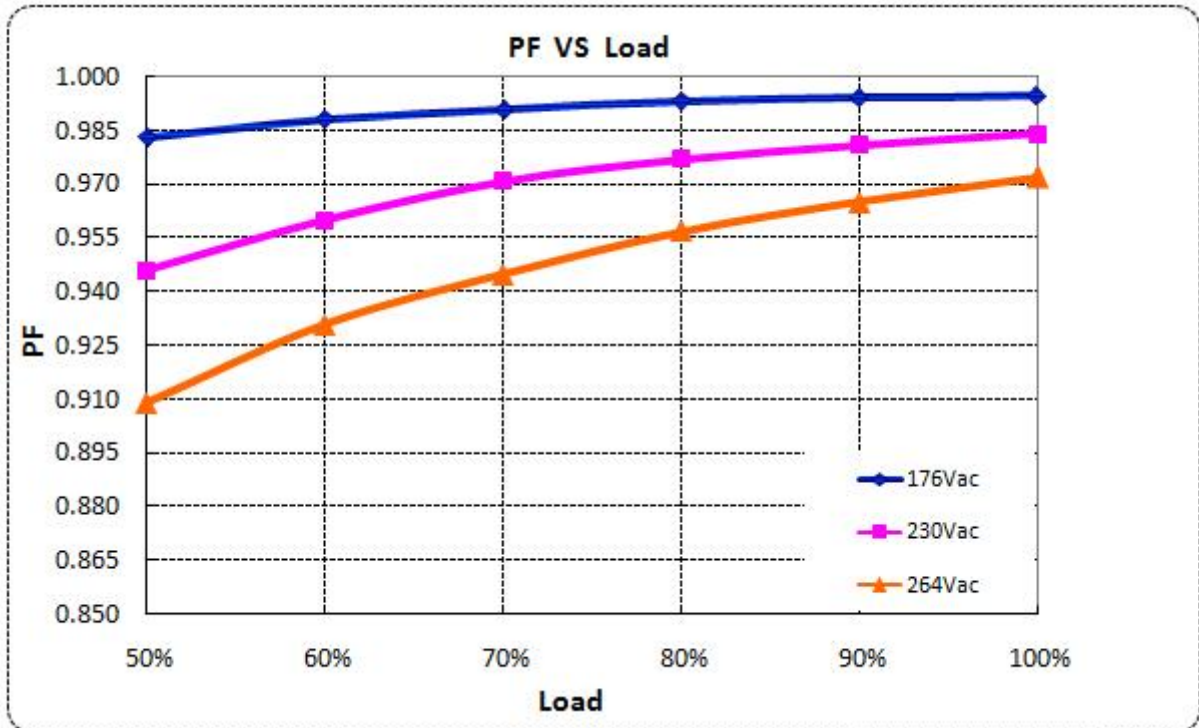


TOTAL HARMONIC DISTORTION

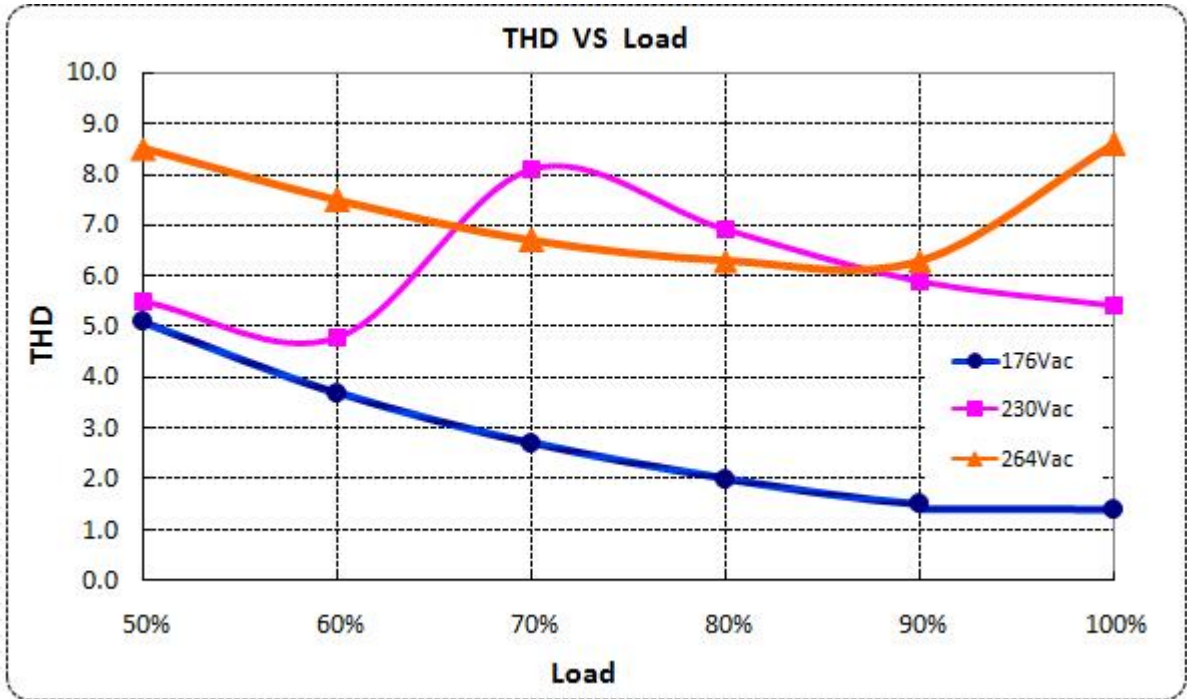


EFFICIENCY VS LOAD

$I_o=0.7A$

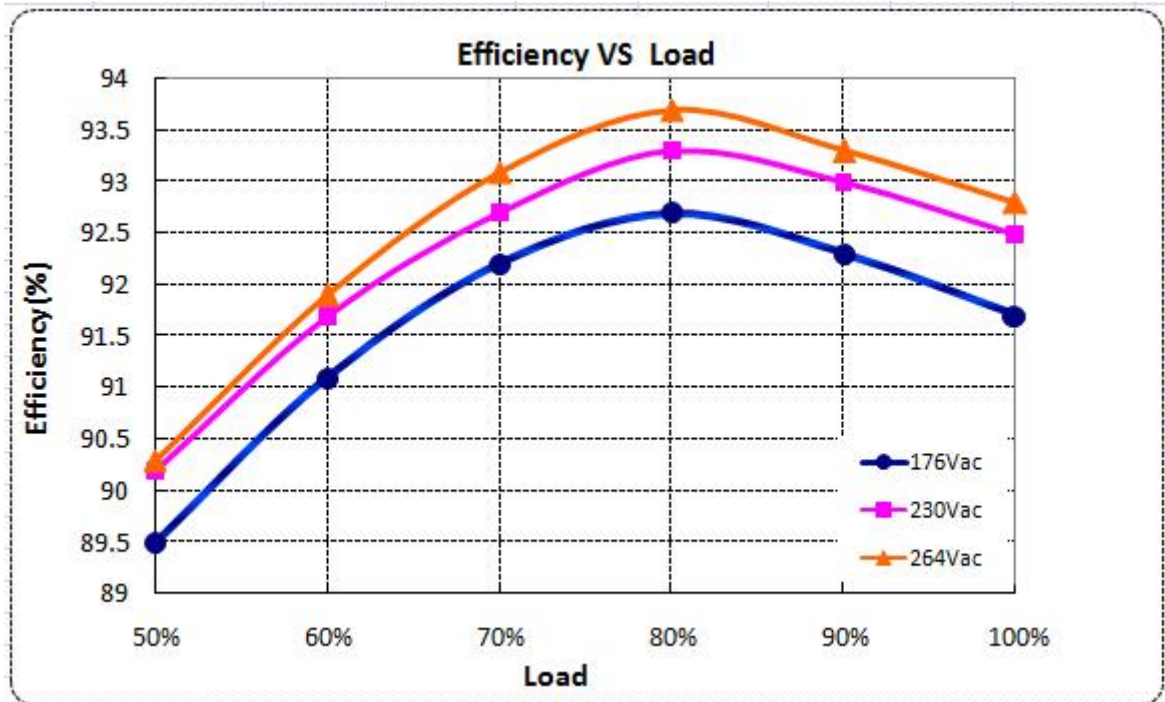


Io=1.05A

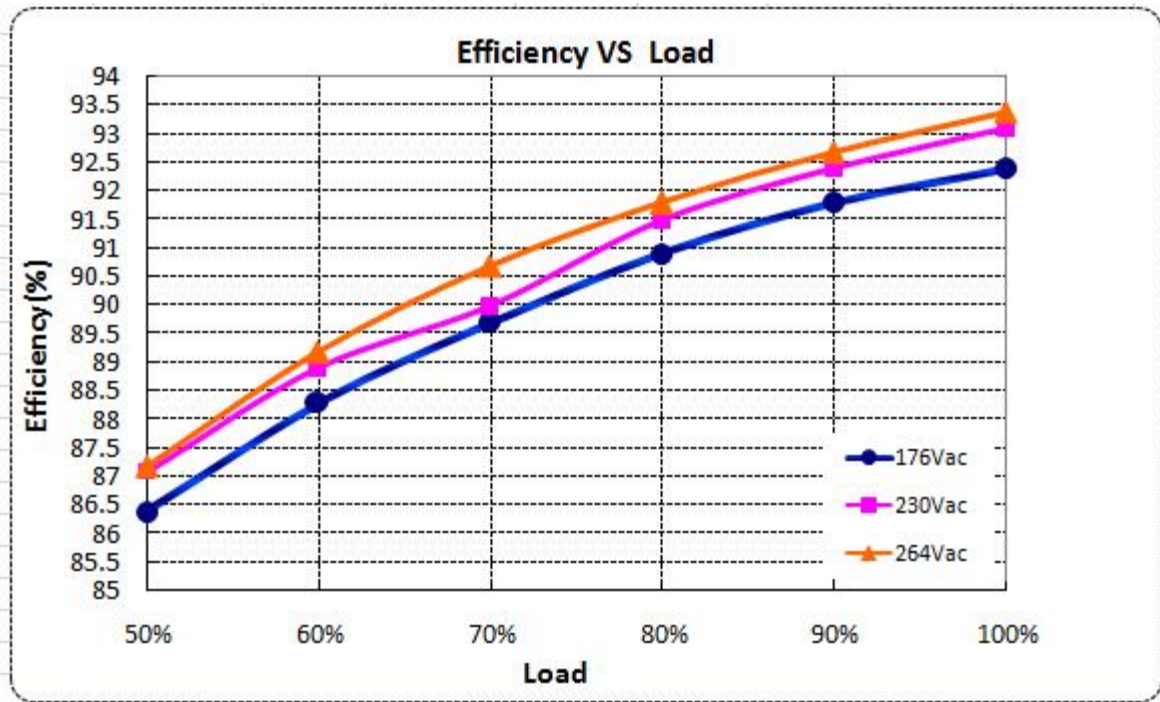

PROTECTIONS


Parameter		Min.	Typ.	Max.	Notes
External NTC	R1	-	7.81kOhm (For reference, subject to actual)	-	When the R-NTC is reduced to R1, the external thermal protection is triggered and the output current gradually decreases
	R2	-	4.16kOhm (For reference, subject to actual)	-	When the R-NTC is reduced to R2, the output current is reduced to the programmed protection current value
	Protection Circuit	10% lo set	60% lo set	100% lo set	10% lo set > lo min (Default setting 60%)
lo min		60% lo set	100% lo set	10% lo set ≤ lo min (Default setting 60%)	
Input Over Voltage Protection		When the input exceeds the rated defined voltage range and enters the protection state, the failure relief will automatically recover.			
Over Temperature Protection		Decreases output current, returning to normal after over temperature is removed.			
Short Circuit Protection		Constant current mode and auto recovery. No damage will occur when any output is short circuited. The output shall return to normal when the fault condition is removed.			
Over Voltage Protection		Run into protection model when output voltage exceeds limit, and return to normal when the fault			

DALI2 DIMMING CURVE

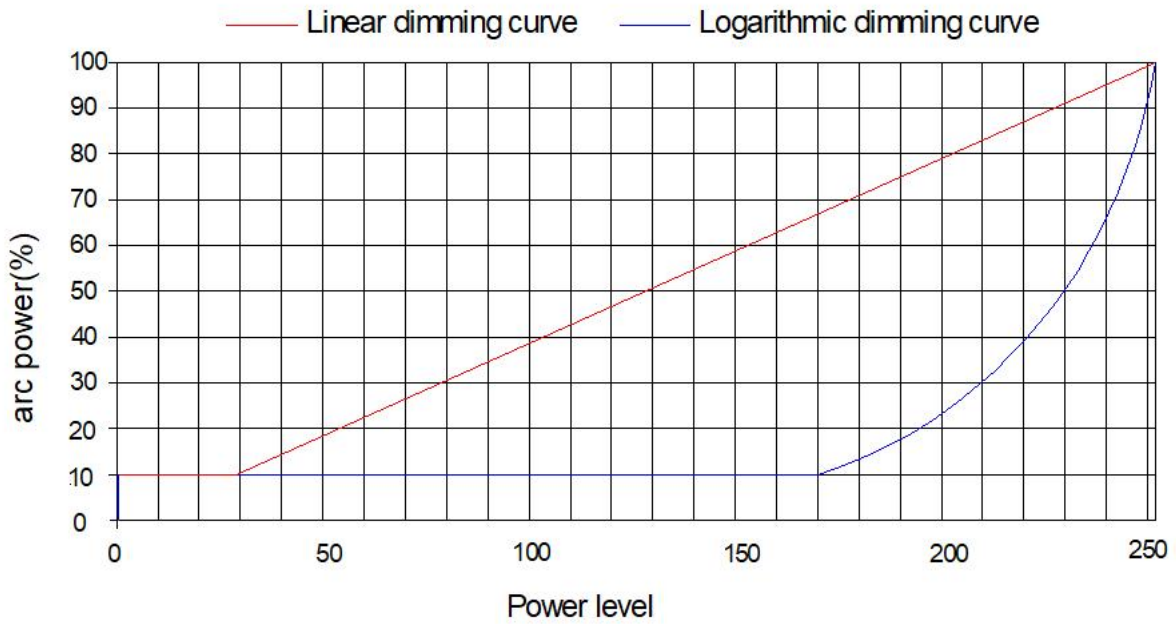

Note: Factory Default Output Logarithmic Curve


DIAGRAM OF UPPER COMPUTER CONNECTION:

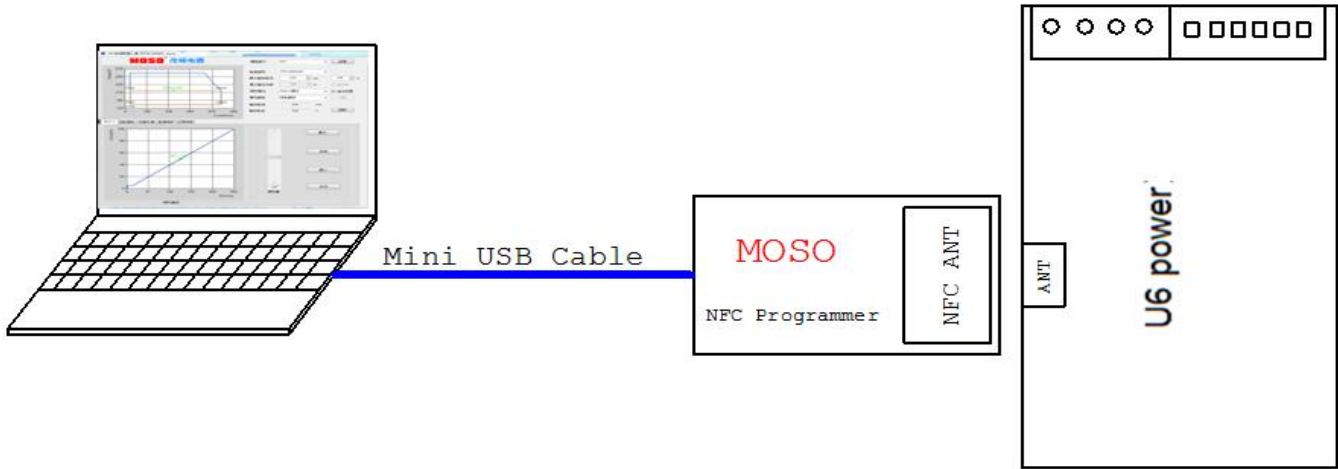


Software programming interface

The screenshot shows the 'LED Driver Configurer Tool V0.36 DEMO' software interface. The main window features a MOSO logo and a graph of Voltage (V) vs Current (mA). The graph shows a constant voltage of 28.8V for currents up to 700mA, followed by a linear decrease. Below the graph, there are tabs for 'DALI-2', 'Timing', 'Constant Lumen', and 'Lamps OTP'. The 'DALI-2' tab is active, showing a 'Dimming Curve' graph with a current of 33.4% at a dimming level of 127. To the right of the graphs are configuration parameters: Port (NFC), Driver Type (U6-200D286), Max Current (700 mA), Max Power (200 W), Dimming Type (DALI-2), Dimming Curve (Linear), Output Current (0.0 mA), and Output Volts (0.0 V). A 'Log' window on the right shows connection status messages.

MECHANICAL OUTLINE

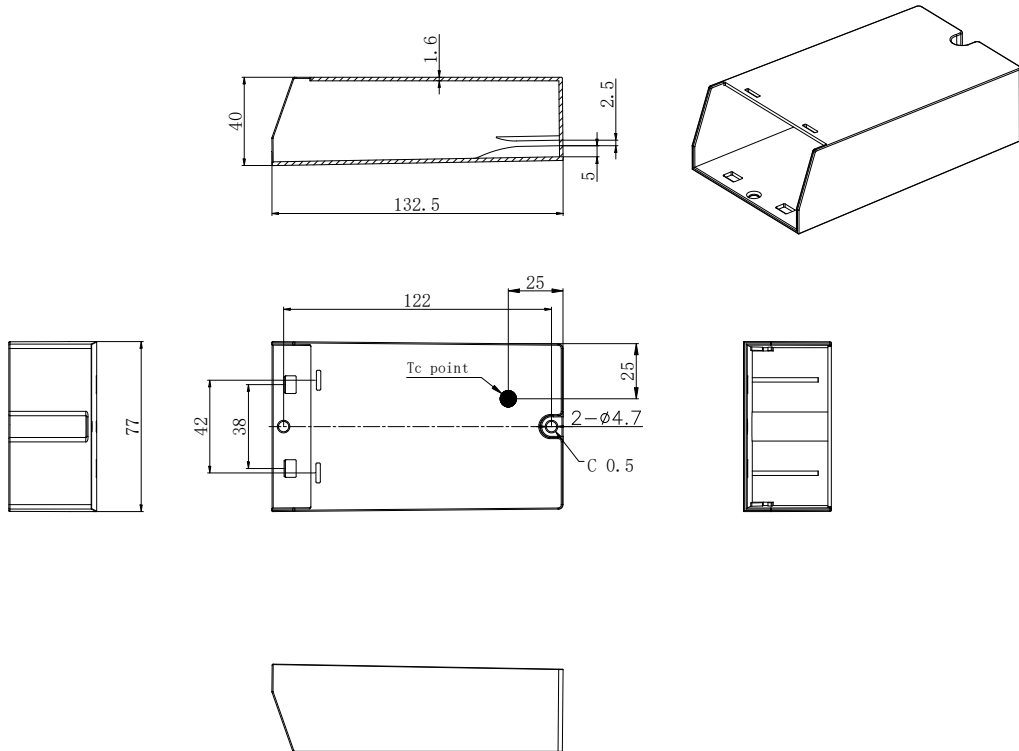

LABEL

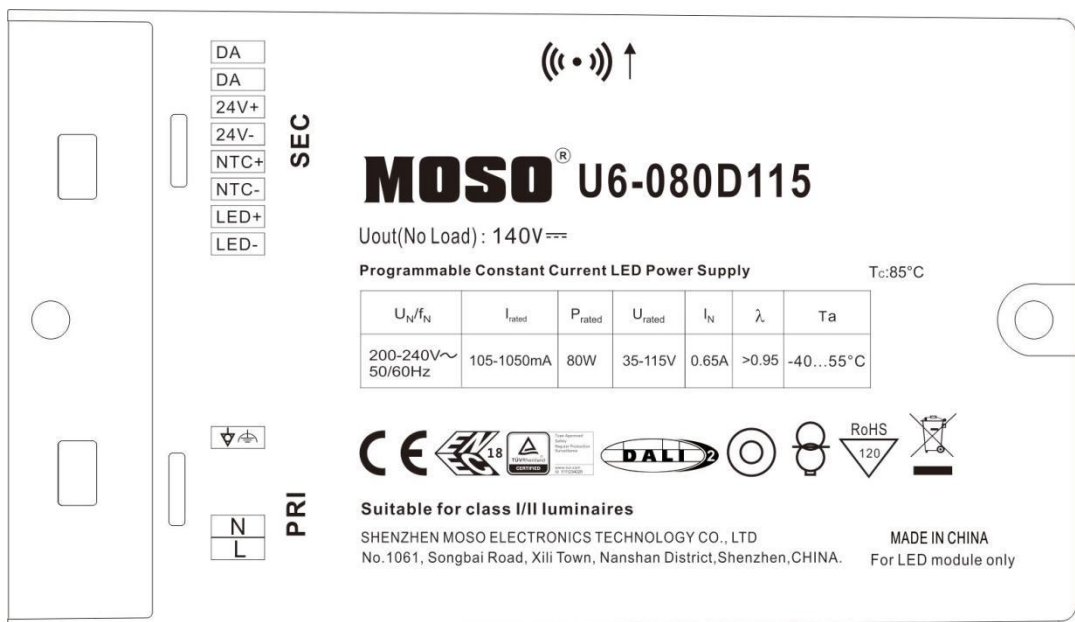

Product Specification

Product Name: 80W NFC Programmable Driver
Product Model: U6-080D115
Rev. D.2

XiLi Songbai Road 1061,
Address: Nanshan District, Shenzhen City,
Guangdong Province, P.R.China
TEL: 0755-27657000
E-mail: info@mosopower.com

Post Code: 518108

FAX: 0755-27657908

Web site: <http://www.mosopower.com>

Prepared By	Checked By	Approved By